

Push-type Detector Switches

SW-110 Series

Features

- ◇ Miniaturized for space saving design.
- ◇ Superior reliability at micro-current by employing a sliding contact.
- ◇ Available in wide variety of mounting methods , operating methods etc.

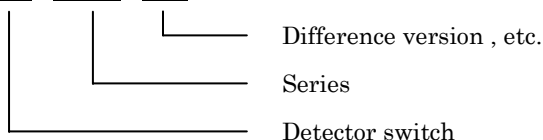


Applications

- ◇ Mechatronic detection for audio and VCR CD-ROM DVD units.

Products Number System

SW - [] [] [] - [] []



1 size

Products Line

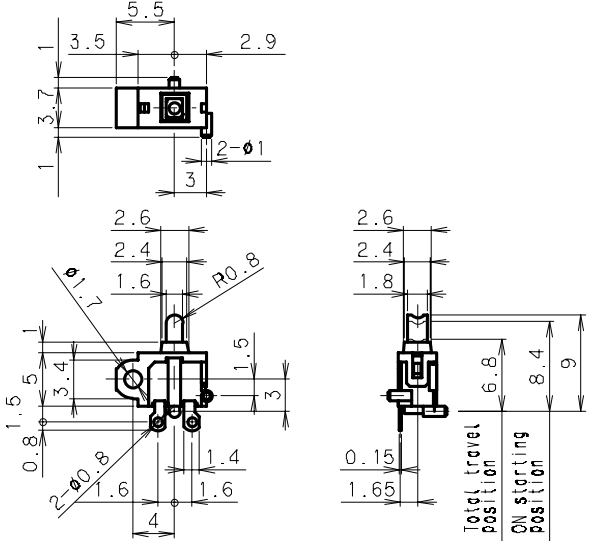

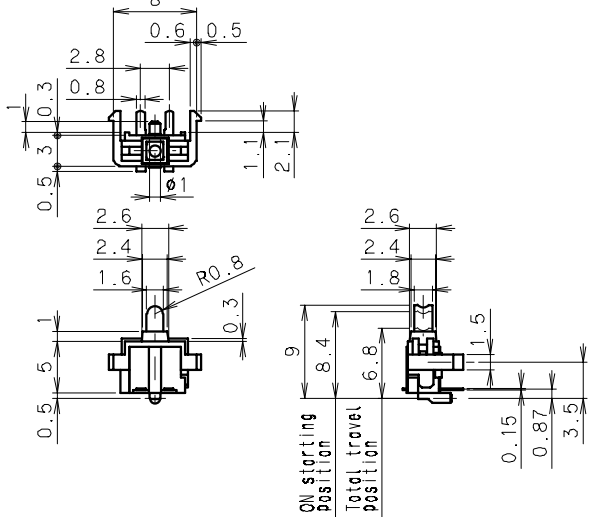
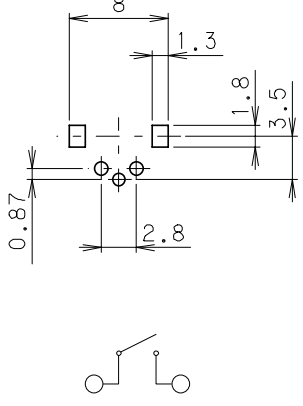
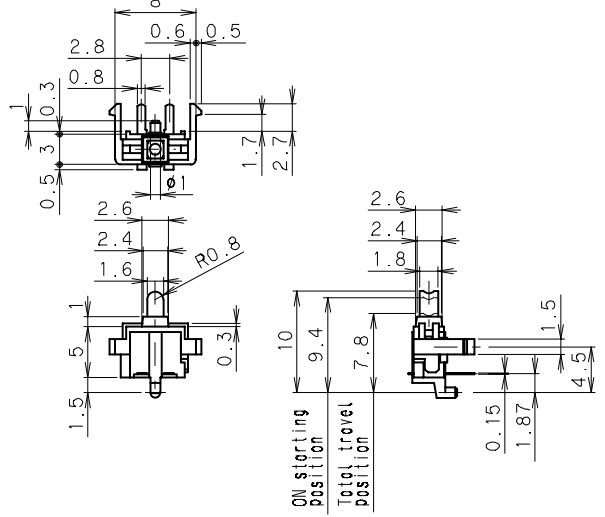
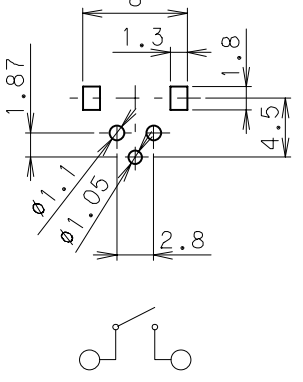
No	Products No	Pole	Position	Operating force	Notes
1	SW-110-6	1	1	1.0N max.	
2	SW-111	1	1	0.5N max.	
3	SW-114S	1	1	0.5N max.	
4	SW-115-1S3	1	1	0.65N max.	

Typical Specifications

Item	Specification
Ratings (max.)	0.5 - 10mA 5V DC (Resistive load)
Contact resistance	1 ohm max.
Insulation resistance	100 megohm min. 100V DC
Withstanding voltage	100V AC for 1min.
Operating life with load	50,000 cycles

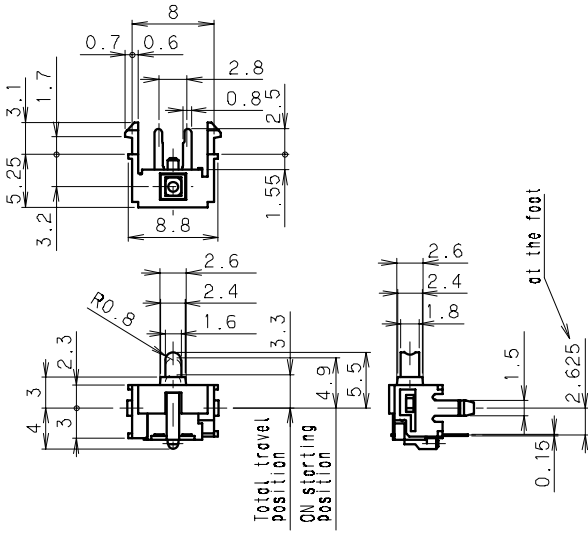
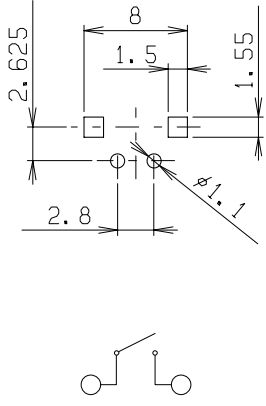
Dimensions

Unit : mm

No	Style	P.C.B reference mounting hole Dimensions , Circuit diagram (TOP VIEW)
1	<p>SW-110-6</p> 	
2	<p>SW-111</p> 	
3	<p>SW-114S</p> 	

Dimensions

Unit : mm

No	Style	P.C.B reference mounting hole Dimensions , Circuit diagram (TOP VIEW)
4	<p>SW-115-1S3</p>  <p>Technical drawings of the SW-115-1S3 switch. The top view shows a rectangular body with a width of 8.8 mm and a height of 5.25 mm. The actuator is 3.2 mm wide and 3.1 mm high. The terminal is 2.6 mm wide and 2.4 mm high. The total travel is 3.3 mm, and the ON starting position is 4.9 mm. The detail view shows a fillet radius of R0.8 and a terminal thickness of 0.15 mm. The side view shows a total height of 5.5 mm and a terminal height of 1.5 mm. The top view also shows a mounting hole diameter of 2.8 mm and a hole offset of 1.5 mm from the center.</p>	 <p>P.C.B reference mounting hole dimensions and circuit diagram. The top view shows a rectangular mounting hole with a width of 2.625 mm and a height of 1.55 mm. The hole is offset by 1.5 mm from the center. The circuit diagram shows a switch with two terminals.</p>

Notes

- The appearance and specifications of the product may be modified to improve its performance without prior notice.
- This catalog shows only outline specifications. When using the product, please obtain formal specifications.
- Please see appendix [Cautions in Using Switches].
- This switch is not washable.
- Soldering shall be done with actuator at free position and take care not to attach flux on plastic portion.
- Note that if the stress is applied to the terminals during soldering, they might cause deformation and defects in electrical performance.
- In manual soldering, consideration should be given to apply the soldering iron to the tip of the terminal so that unusual pressure is not applied to the terminal.
- In case circuit and software design consideration against chattering and bouncing shall be taken as below.
 - Read a few times. (Ex. 5ms for 5 times)
 - Set delay time.
 - Set integral circuit.
- As to threshold voltage, center setting is recommended.
- Care shall be taken not to apply stress to the body of switch as it may affect the performance.
- Please confirm the performance on actual operation by simulation with actual environment environments for high reliability.