



SCHEMATIC

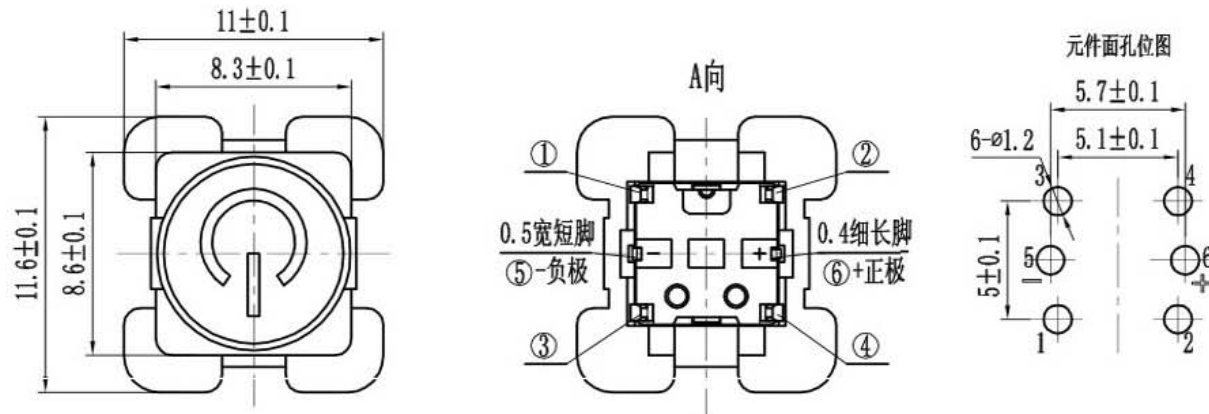

SPECIFICATIONS

1. RATING : 0.5mA 12VDC MAX .
2. CONTACT RESISTANCE : 100 mΩ MAX .
3. INSULATION RESISTANCE : 500 V DC , 100 MΩ MIN
4. OPERATING TEMPERATURE : -20℃ ~ 70℃ .
5. OPERATING FORCE : 160±50gf . 250±50gf
6. OPERATING LIFE : 100,000 CYCLES .

	广东科斯达开关厂				9					
	TITLE : LLUMINATED TACTILE SWITCH				8					
	MODEL : CB-013-DWX-000-000-05B-05				7					
	DRAWING NO. : JX-DR-CB013D-00				6	CAP	ABS/PC	1 SLIVER /BLACK		
UNIT : M M	DWN.	LSX	2015-02-18	GENERAL TOLERANCE	5	CONTACT	PBS	1 Ag CLAD		
SCALE : 5 : 1	CHK'D	LJ	2015-02-18	WITHIN 1.5mm ± 0.1mm	4	TERMINAL	BRASS STRIP	4 Ag PLATED		
LEVEL 1	REV R1	APPD.	CC	2015-02-18	OVER 1.5mm ± 0.2mm	3	BASE	PA66	1 BLACK	
						2	COVER	PET	1 NATURAL	
						1	KNOB	PA66	1 WHITE	
						NO.	PART NAME	MATERIAL	QTY.	FINISHING