



SCHEMATIC

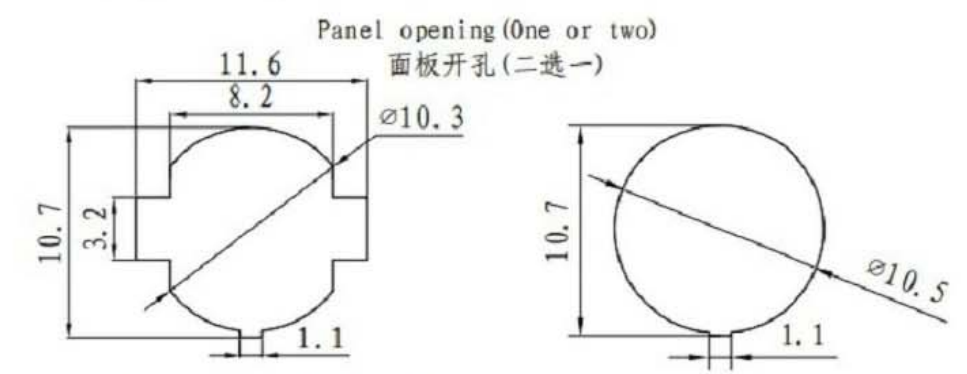

Panel opening (One or two)
面板开孔 (二选一)

SPECIFICATIONS

1. RATING : 0.5mA 12VDC MAX .
2. CONTACT RESISTANCE : 100 mΩ MAX .
3. INSULATION RESISTANCE : 500 V DC , 100 MΩ MIN
4. OPERATING TEMPERATURE : -20℃ ~ 70℃ .
5. OPERATING FORCE : 160±50gf . 250±50gf
6. OPERATING LIFE : 100,000 CYCLES .

	<h1>广东科斯达开关厂</h1>				9				
	TITLE : LLUMINATED TACTILE SWITCH				8				
	MODEL :				7				
DRAWING NO. : -				6	CAP	ABS/PC	1	SLIVER /BLACK	
				5	CONTACT	PBS	1	Ag CLAD	
				4	TERMINAL	BRASS STRIP	4	Ag PLATED	
UNIT : M M				3	BASE	PA66	1	BLACK	
DWN. : LSX				2	COVER	PET	1	NATURAL	
SCALE : 5 : 1				1	KNOB	PA66	1	WHITE	
CHK'D : LJ				NO.	PART NAME	MATERIAL	QTY.	FINISHING	
2015-02-18									
APPD. : CC									
2015-02-18									
GENERAL TOLERANCE									
WITHIN 1.5mm±0.1mm									
OVER 1.5mm±0.2mm									