
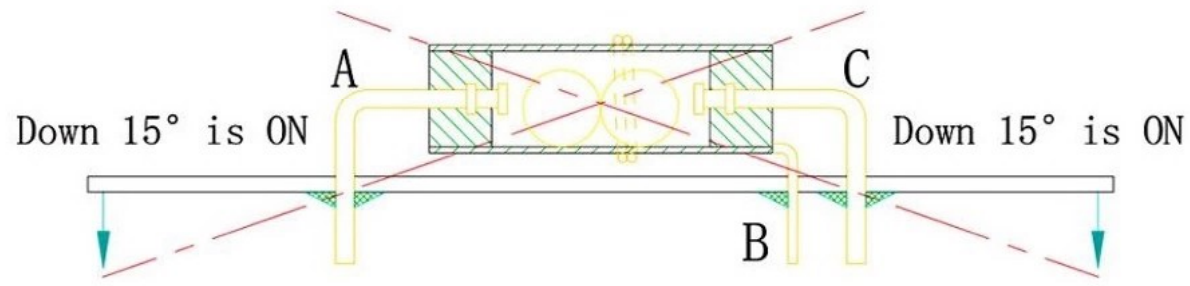


F E D C B A

1
2
3
4

1
2
3
4

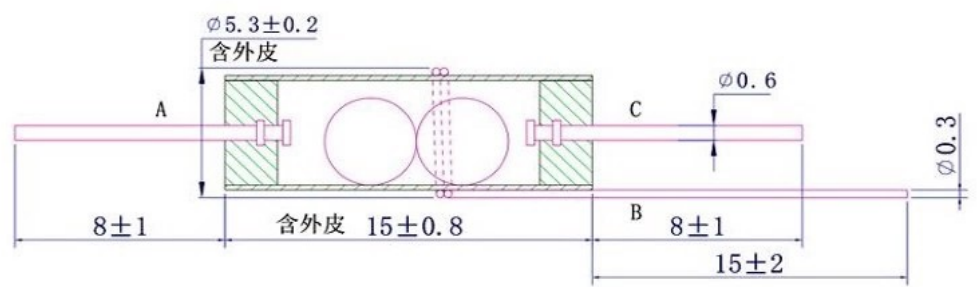

铜帽	导针	滚珠	封口胶粒	热收缩管	弹簧引线	操作寿命
Brass, silver gold-plated	Brass gold-plated	Brass / steel silver/ gold-plated	Temperature resistance nylon	Phosphor bronzewire	PE/PET heat shrinkable tubing	10万次

- ▶ 电压: 1-6V
- ▶ 电流: <20mA
- ▶ 导通时间: about 2ms
- ▶ 闭路电阻: <30 Ω
- ▶ 开路电阻: >10 MΩ
- ▶ 耐温: Operating: -40°C to 80°C
- ▶ 端子拉力: 500gf for 1 minute
- ▶ 湿度: 95% RH, 40°C for 24 hours

 **广东科斯达电子科技有限公司**
Guang dong Keside Electronic Technology Co., Ltd.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		TILT SENSOR SWTICH		DRAWING	G.C.Chen	DWG.No.	SBIRB6
PART NO.				CHECK	G.C.Chen	REV.	A
UNIT: mm	TOLERANCE	UP TO 5 ±0.2	ANGLE	APPROVAL	DATE		
	OTHERWISE	ABOVE 5~30 ±0.3	0°±3'		SCALE	5:1	PAGE

F E D C B A