

F


E

D

C





B

A

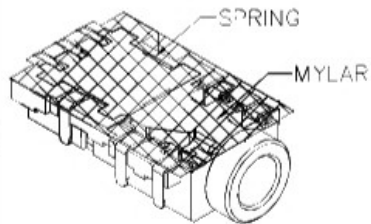


RoHS
Compliant

ZONF	SYMBOL	REVISION	A-PROVAL	DATE

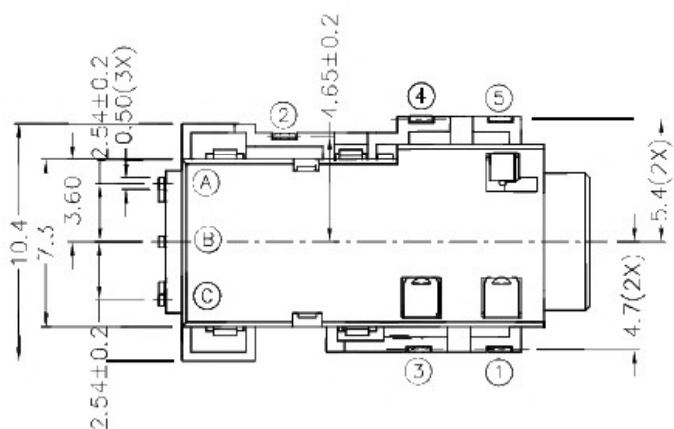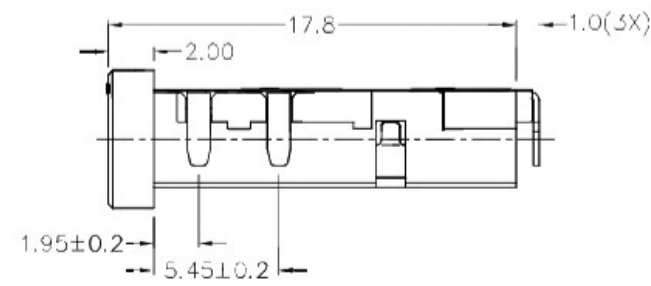
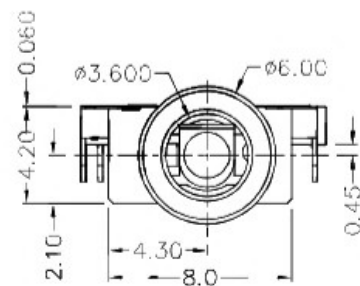
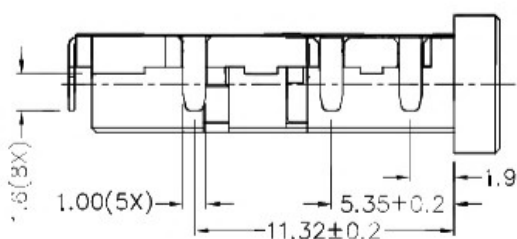


* MATERIAL

- TERMINAL 1 : COPPER ALLOY
- TERMINAL 2 : COPPER ALLOY
- TERMINAL 3 : COPPER ALLOY
- TERMINAL 4 : COPPER ALLOY
- TERMINAL 5 : COPPER ALLOY
- SPRING : STAINLESS STEEL
- HOUSING : HIGH TEMP. PLASTIC
- COVER : HIGH TEMP. PLASTIC
- MYLAR : POLYIMIDE
- DRIVE IC :

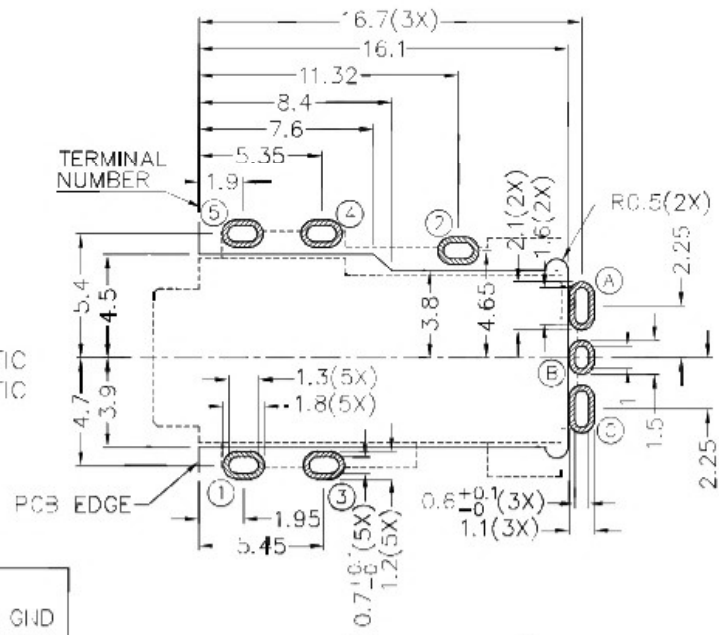

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05
(TOP VIEW)

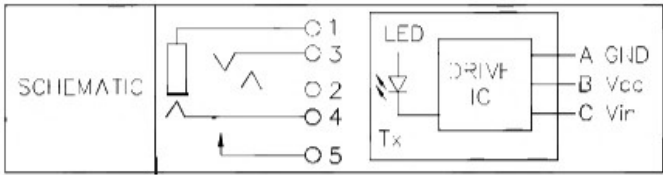

广东科斯达开关厂

DESIGN	X.N.ZHENG	DATE	21-10-2009	SCALE	3:1
DRAWING	H.Q.ZHOU	DATE	14-3-2017	MATERIAL	*
CHECK	T.Y.LI	DATE	14-3-2017	DWG. NO.	140J0040:11-A/1.0
APPROVAL		DATE		SHEET	

PART NAME	3.5mm SMD STEREO JACK/OPTO	TOLERANCE UNLESS	0.0±0.2	UNIT:	mm
PART NO.		OTHERWISE SPECIFIED:	0.00±0.1 0.00±0.05		

F

E

D

C

B

A