| ZONE | SYMBOL | REVISION | APPROVAL | DATE |
|---|---|---|---|---|
| | | ADJUST THE RECOMMENDED DC MATING PLUG | J.X.KUANG | 8-10-2019 |
| | | | | |
| | | | | |

RoHS Compliant



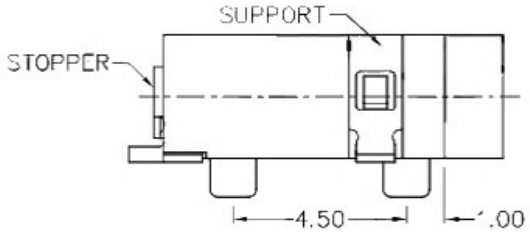


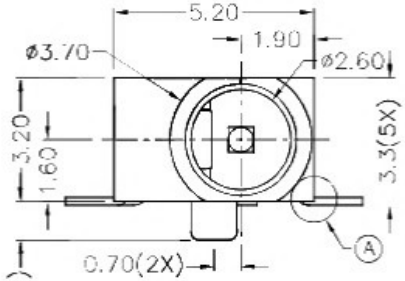





A DETAIL COPLANARITY

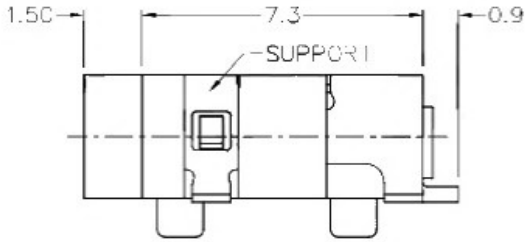


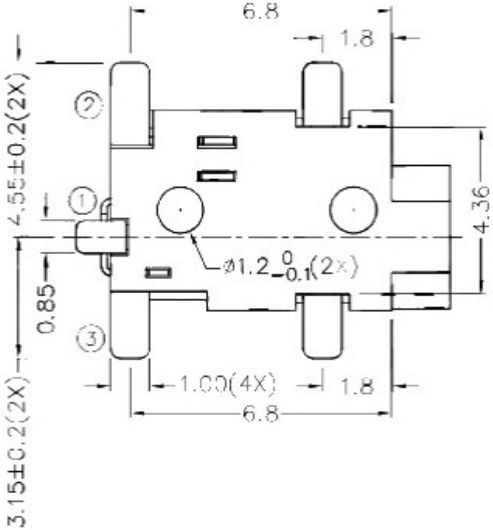


* MATERIAL

| | |
|---|---|
| TERMINAL 1 | : COPPER |
| TERMINAL 2 | : COPPER ALLOY |
| TERMINAL 3 | : BRASS |
| SUPPORT | : BRASS |
| STOPPER | : STAINLESS STEEL |
| HOUSING | : HIGH TEMP. PLASTIC |

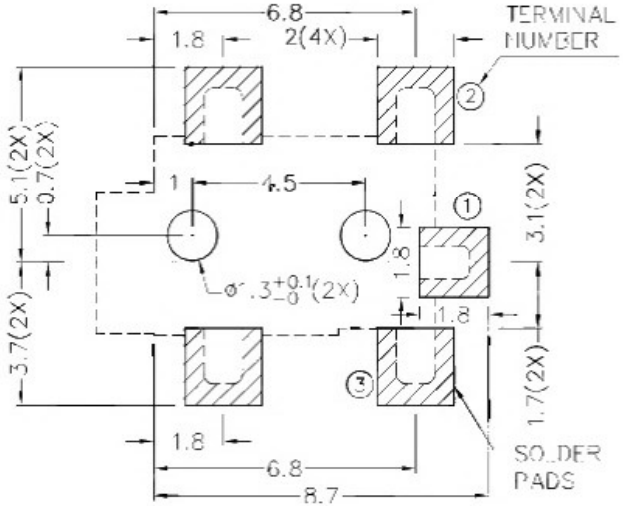


RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05
(TOP VIEW)

| | |
|---|---|
| SCHEMATIC |  |
| CENTER PIN | ø0.650mm |






RECOMMENDED DC MATING PLUG

广东科斯达开关厂

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| | | | | DESIGN | T.Y.LI | DATE | 28-2-2006 | SCALE | 5:1 |
| | | | | DRAWING | H.Q.ZHOU | DATE | 8-10-2019 | MATERIAL | * |
| PART NAME | SMD DC POWER SOCKET | TOLERANCE UNLESS OTHERWISE SPECIFIED: | 0.0±0.2<br>0.00±0.1<br>0.000±0.05 | CHECK | H.L.TAN | DATE | 8-10-2019 | DWG. NO. | T7\DC065D-A/1.1 |
| PART NO. | | | UNIT: mm | APPROVAL | | DATE | | SHEET | |