

F

E

D






C

B


A

ZONE	SYMBOL	REVISION	APPROVAL	DATE


RoHS
Compliant

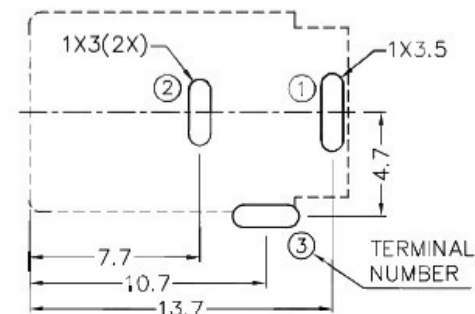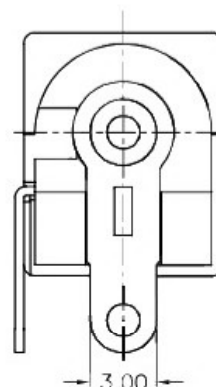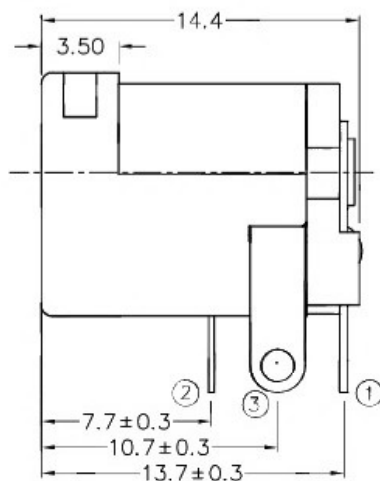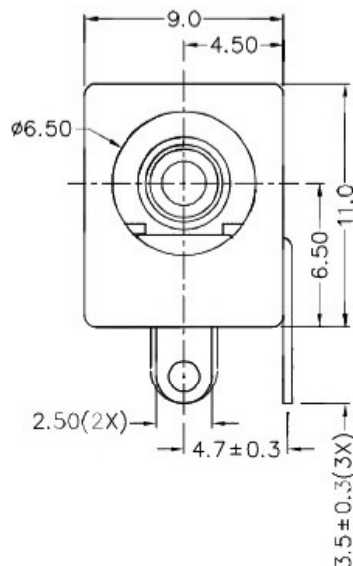

RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05
(TOP VIEW)





DC MATE PLUG

MODEL NO.	
SCHEMATIC	
CENTER PIN	$\phi 1.65\text{mm}$
	$\phi 2\text{mm}$
	$\phi 2.5\text{mm}$

*** MATERIAL**

CENTRE PIN : COPPER
TERMINAL 1 : BRASS
TERMINAL 2 : COPPER ALLOY
TERMINAL 3 : BRASS
HOUSING : THERMOPLASTIC
COVER : THERMOPLASTIC

 **广东科斯达开关厂**

PART NAME	DC POWER SOCKET	TOLERANCE UNLESS	0.0 \pm 0.2	UNIT:		DESIGN	T.Y.LI	DATE	18-10-2005	SCALE	3:1
PART NO.		OTHERWISE SPECIFIED:	0.00 \pm 0.1 0.000 \pm 0.05	mm		DRAWING	H.Q.ZHOU	DATE	9-9-2016	MATERIAL	*
						CHECK	H.L.TAN	DATE	9-9-2016	DWG. NO.	TZ\DC002-1-B/1.0
						APPROVAL		DATE	9-9-2016	SHEET	

F

E

D

C

B

A