


PCB LAYOUT

SECTION A-A

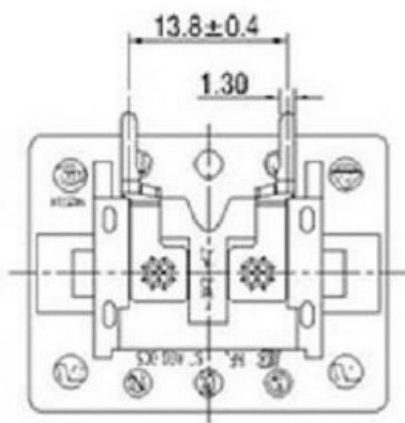

SPEC:

A. Material:

1. Housing: PBT WITH G/F30% UL 94V-0
2. Terminal: COPPER ALLOY, TIN PLATED

B. Electrical Characteristics:


1. Rating: 2.5A 250V~(UL, CUL, VDE, CCC, SEMKO, DEMKO, FIMKO, IEMKO, KC)
2. Electric Strength: AC 2,000 V FOR ONE MINUTE
3. Insulation Resistance: 100MΩ MIN, AT 500VDC

C. Approvals:

UL, CUL, VDE, CCC, SEMKO, DEMKO, FIMKO, IEMKO, KC

PANEL THICKNESS

(1.5, 2.0)

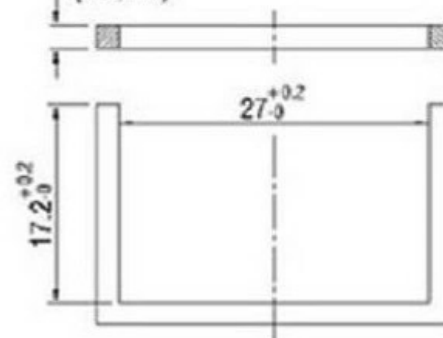

PANEL CUT-OUT

				普通公差	 广东科斯达电子科技有限公司 Guang dong Keside Electronic Technology Co., Ltd.						
				COMMON TOLERANCE :							
				UP TO 5	±0.20	单位	mm	投影		品名	AC power socket
				ABOVE 5 TO 30	±0.30	UNIT		核 对	张 平	型 号	
				ABOVE 30	±0.50	绘 图	林晓良	核 对	张 平	模 型 号	
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	日期	19. 08. 12	核 准	周培雷	料 号	KSD-AC JACK
								APPROVAL BY		PART NO.	