
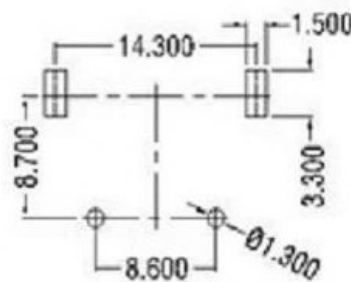


SECTION A-A

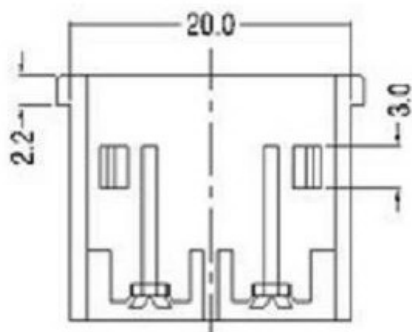

PCB LAYOUT

SPEC:

A. Material:


- 1. Housing: PA66(HP)
- 2. Terminal: COPPER ALLOY, TIN PLATED

B. Electrical Characteristics:

- 1. Rating: 2.5A 250V~
(UL, CUL, VDE, CCC, SEMKO, DEMKO, FIMKO, NEMKO, KC)
- 2. Electric Strength: AC 2,000 V FOR ONE MINUTE
- 3. Insulation Resistance: 100MΩ MIN, AT 500V DC

C. Approvals:

UL, CUL, VDE, CCC, SEMKO, DEMKO, FIMKO, NEMKO, KC

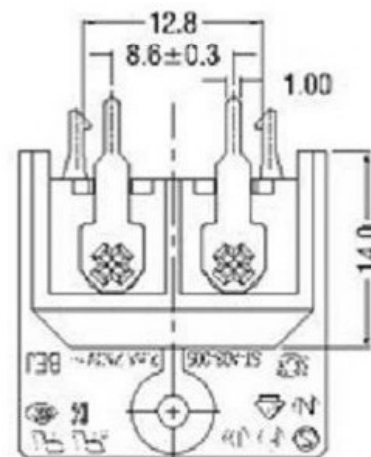

				普通公差 COMMON TOLERANCE :	 广东科斯达电子科技有限公司 Guang dong Keside Electronic Technology Co., Ltd.					
				UP TO 5 ±0.20						单位
				ABOVE 5 TO 30 ±0.30	绘图	林晓良	核对	张平	型号	
				ABOVE 30 ±0.50	日期	19.08.12	核准	周培雷	料号	KSD-AC JACK
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR ±5°	DATE		APPROVAL BY		PART NO.	