


### SPEC:

A. Material:

1. Housing: PC
2. Holder: PC
3. Terminal: PHOSPHOR COPPER, NI PLATED
4. UL PIN: PA + COPPER ALLOY, NI PLATED
5. COVER: PC

B. Electrical Characteristics:

1. Rating: 2.5A 250V ~
2. Electric Strength: AC 2,000 V FOR ONE MINUTE
3. Insulation Resistance: 100MΩ MIN. AT 500V DC

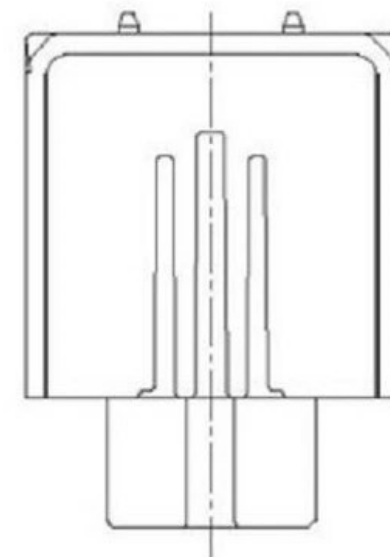

				普通公差 COMMON TOLERANCE :	 <b>广东科斯达电子科技有限公司</b> Guang dong Keside Electronic Technology Co., Ltd.					
				UP TO 5     ±0.20						单位
				ABOVE 5 TO 30     ±0.30	绘图	林晓良	核对	张平	型号	
				ABOVE 30     ±0.50	日期	19. 08. 12	核准	周培雷	料号	KSD-AC JACK
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR     ±5°	DATE		APPROVAL BY		PART NO.	