



1. FUNCTION: 1P2T ON-(OFF)
2. RATING: UL: 5A 125/250VAC 20T105 μ 5E4
ENEC CB: 5(3)A 250VAC 20T105 μ 5E4
3. CONTACT RESISTANCE: $\leq 20m\Omega$
4. INSULATION RESISTANCE: $\geq 100 M\Omega$
5. DIELECTRIC WITHSTAND: TERMINAL TO BUTTON 3000VAC/10mA/1MINUTE
TERMINAL TO TERMINAL 1000VAC/10mA/1MINUTE

6. Circuit Diagram



7. Mounting Holes

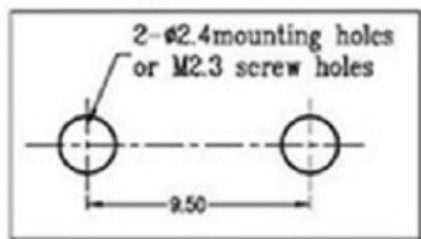

CHARACTERISITICS	
Operating Force:	250±50g.f
Release Force:	20g.f
Operation Position:	9.1±0.3mm
Pre Travel:	1.8mm max
Differential travel:	0.3mm max
Over Travel:	0.6mm min

NO.	PARTS	MATERIALS	Q'TY	TOLERANCE UNLESS SPECIFIED	DATE	DESCRIPTIONS OF REVISION	APPD.
8				WITHIN 1.5mm : ±0.1mm	A	初版	
7				OVER 1.5mm : ±0.2mm	ISSUE		
6				TITLE : Micro Switch			
5	SPRING	SUS	1	UNIT : mm		DRWG NO.:	
4	CAM STICK	SUS	1	SCALE: 5:1		DWN.	2012-8-13
3	CASE	PA66/BRASS STRIP	1	MODEL:		CHK'D	
2	COVER	PA66	1	 广东科斯达开关厂		APPD.	2012-8-13
1	KNOB	PA66/PBS C5210R-EH	1				