
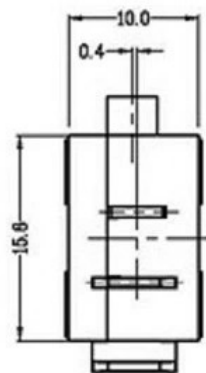
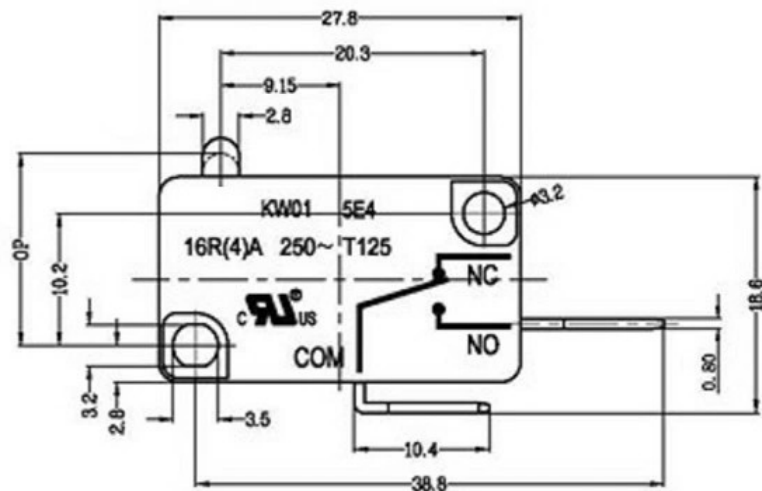



8、TRAVEL:

FREE POSITION	15.8±0.5mm
OPERATING POSITION	14.3±0.5mm
PRE TRAVEL	1.6 Max
OVER TRAVEL	1.0 Min

9、CIRCUIT DIAGRAM:



- 1、FUNCTION: OFF-(ON)
- 2、RATING: UL: 16R(4)A 250V~ T125 5E4
ENEC/VDE/CQC: 16R(4)A 250V~ T125 5E4
- 3、OPERATION FORCE: 250±50g.f
- 4、CONTACT RESISTANCE: ≤ 50 mΩ
- 5、INSULATION RESISTANCE: ≥ 100 MΩ
- 6、DIELECTRIC WITHSTAND: TERMINAL TO BUTTON 3000VAC/5mA/1MIN/TUE
TERMINAL TO TERMINAL 1500VAC/5mA/1MIN/TUE
- 7、CONTACT SPACING: < 3 mm

NO.	PARTS	MATERIALS	Q'TY		TOLERANCE UNLESS SPECIFIED						
8					WITHIN 1.5mm : ±0.1mm	A	2012-8-13	初版			
7					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.		
5	SPRING	SUS	1	NATURAL	TITLE : Micro Switch				UNIT : mm	DRWG NO.:	
4	CAM STICK	SUS	1	NATURAL	MODEL:				SCALE: 5:1	DWN.	2012-8-13
3	CASE	PA66/BRASS STRIP	1	GREY/Ag PLATED	 广东科斯达开关厂				CHK'D		
2	COVER	PA66	1	BLACK					APPD.		2012-8-13
1	KNOB	PA66/PBS C5210R-EH	1	WHITE/Ag CLAD							