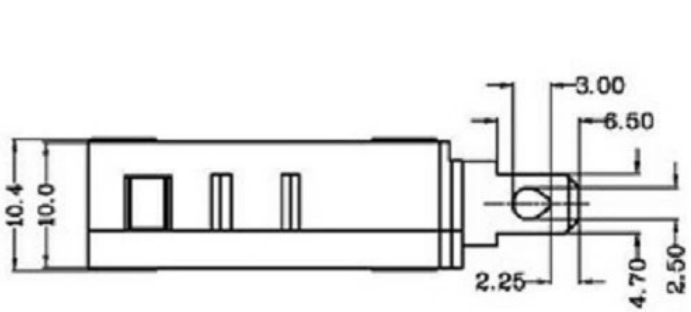

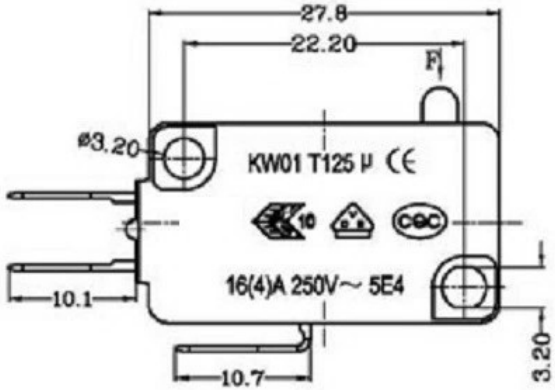



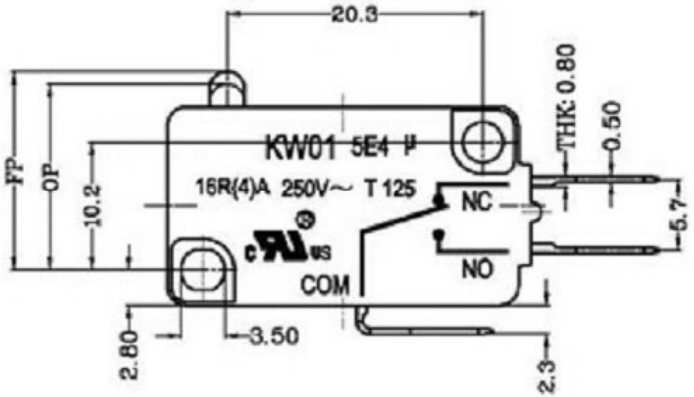

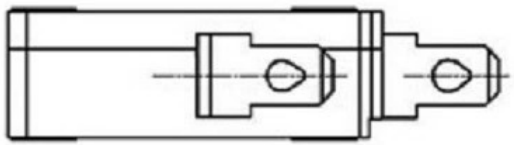

1、FUNCTION: ON-(ON)
2、RATING: UL/ENEC VDE/CQC: 16R(4)A 250V~ T125 5E4μ
3、OPERATION FORCE: 140±50g.f
4、CONTACT RESISTANCE: ≤ 50 mΩ
5、INSULATION RESISTANCE: ≥ 100 MΩ
6、DIELECTRIC WITHSTAND: TERMINAL TO BUTTON 3000VAC/5mA/1MINTUE
TERMINAL TO TERMINAL 1500VAC/5mA/1MINTUE
7、CONTACT SPACING: < 3 mm

8、TRAVEL:

FREE POSITION	15.8±0.5mm
OPERATING POSITION	14.8±0.5mm
PRE TRAVEL	1.2 Max
OVER TRAVEL	1.0 Min

9、CIRCUIT DIAGRAM:



NO.	PARTS	MATERIALS	Q'TY	
8				
7				
6				
5	SPRING	SUS	1	NATURAL
4	CAM STICK	SUS	1	NATURAL
3	CASE	PA66/BRASS STRIP	1	GREY/Ag PLATED
2	COVER	PA66	1	BLACK
1	KNOB	PA66/PBS C5210R-EH	1	WHITE/Ag CLAD

TOLERANCE UNLESS SPECIFIED				
WITHIN 1.5mm : ±0.1mm	A	2012-8-13	初 版	
OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.

TITLE : Miocro Switch
UNIT : mm
DRWG NO.:
MODEL:
SCALE: 5:1
DWN. 2012-8-13
CHK'D 2012-8-13
APPD.

广东科斯达开关厂