

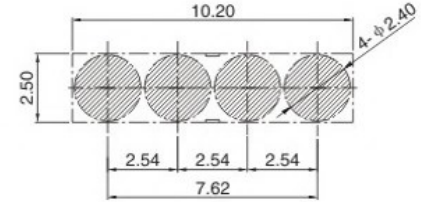

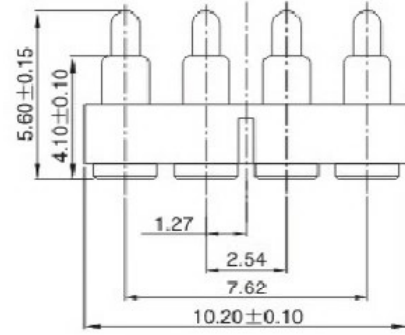


DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
18/12'06			NEW DWG		A0



1. 材料和电镀

接触头为(斜头)黄铜合金(C3604), 镀镍50-70 μ "镀金1 μ "
 导管为黄铜合金(C3604), 镀镍50-70 μ "镀金1 μ "

2. 塑胶材质

PA46+30%玻纤

3. 弹力: 120g \pm 10%

4. 持续工作电流: 1A

5. 工作电压: 12V AC/DC

接触电阻: 30mOhm Max

6. 使用寿命: 20000次

7. 工作温度计: -40 $^{\circ}$ C - 80 $^{\circ}$ C 90% R. H. Max

8. 中性盐雾测试24小时无锈蚀

-TOLERANCES-		UNLESS OTHERWISE SPECIFIED	
公差参考表			
X.	± 0.10	X'	$\pm 2.00'$
XX	± 0.05		
XXX	± 0.02	X.X'	$\pm 1.00'$
X.XXX	——		



TITLE: 产品品名: POGO PIN		PRODUCT NO: 产品料号:	
DATE	SCALE	UNIT	PAGE
2016.11.21	1:1	mm	1/1
DRAW:	王芬利		