
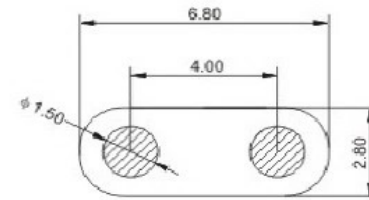
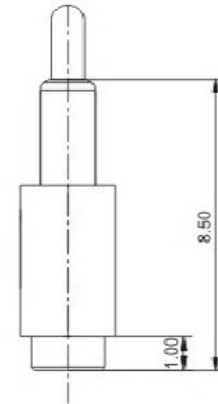
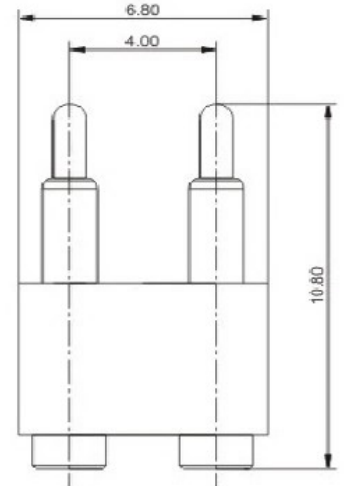


DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
18/12'06			NEW DWG		AO



LAYOUT

NOTES:

1.MATERIAL

INSULATOR:HIGH TEMPERATURE PLASTIC(UL94V-0),PA-46
 PLUNGER:BRASS,3u" GOLD PLATING 50u"MIN UNDERPLATED.
 BARREL:BRASS,3u" GOLD PLATING OVER 50u"MIN NICKEL UNDERPLATED
 SPRING:STAINLESS STEEL

2.SPECIFICATION:

ELECTRICAL
 CURRENT RATING:12VDC,1A
 INSULATING RESISTANCE:15m/U+2126 Min
 CONTACT RESISTANCE: 50M/U+2126 Max
 ENVIRONMENTAL
 TEMPERATURE RANGE:40℃~85℃

3.MECHANICAL FUNCTION:

SPRING PROBE FORCE
 WORKING STROKE :280g±30g AT 1.8mm RECOMMEND STROKE
 MAX,STROKE:AT 2.3mm FULL STROKE
 DURABILITY:10,000 CYCLES/1.8mm STROKE

1. 材料和电镀

接触头为(斜头)黄铜合金(C3604), 镀镍50-70 μ" 镀金1 μ"
 导管为黄铜合金(C3604), 镀镍50-70 μ" 镀金1 μ"

2. 塑胶材质

PA46+30%玻纤

3. 弹力: 120g±10%

4. 持续工作电流: 1A

5. 工作电压: 12V AC/DC


接触电阻: 30mOhm Max

6. 使用寿命: 20000次

7. 工作温度计: -40℃ - 80℃ 90% R. H. Max

8. 中性盐雾测试24小时无锈蚀

-TOLERANCES-		UNLESS OTHERWISE SPECIFIED	
公差参考表			
X.	±0.10	X'	±2.00'
XX	±0.05		
XXX	±0.02	X.X'	±1.00'
X.XXX	——		



TITLE:
 产品品名: POGO PIN
 PRODUCT NO:
 产品料号:

APPD: 核准:	王芬利	DATE	SCALE	UNIT	TYPE	PAGE
CHECK: 校对:		2016.11.21	1:1	mm	CD	1/1
DRAW: 绘图:						