
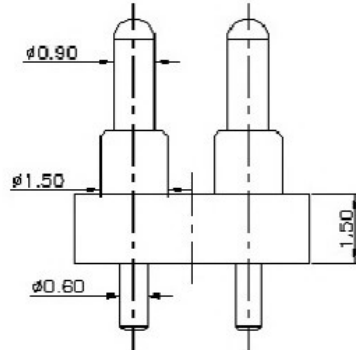


DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
18/12'06			NEW DWG		AO

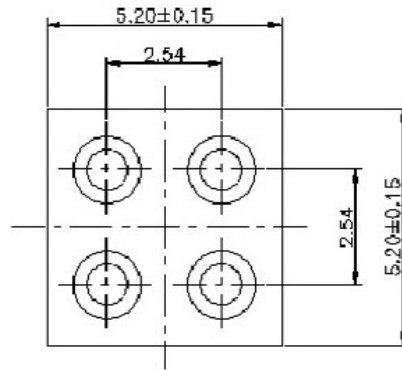

1. 材料和电镀

接触头为(斜头)黄铜合金(C3604), 镀镍50-70 μ"镀金1 μ"
 导管为黄铜合金(C3604), 镀镍50-70 μ"镀金1 μ"

2. 塑胶材质

PA46+30%玻纤

3. 弹力: 120g ± 10%

4. 持续工作电流: 1A

5. 工作电压: 12V AC/DC

接触电阻: 30mOhm Max

6. 使用寿命: 20000次

7. 工作温度计: -40℃ - 80℃ 90% R. H. Max

8. 中性盐雾测试24小时无锈蚀

NOTE

1. Material

Plunger: Brass 3604

Barrel: Brass 3604

Spring: SUS304

Housing: PA46

2. Plating

Plunger: 3 micro-inch minimum Au over 50~100 micro-inch nickel

Barrel: 3 micro-inch minimum Au over 50~100 micro-inch nickel

3. Electrical

Rated current & voltage: DC 12V; 1A .


Contact resistance: 50 mohm maximum at working height

4. Mechanical

Spring force: 35g ± 20% at working height Δ

Durability: 10,000 cycles (minimum)


5. RoHS compliant product.

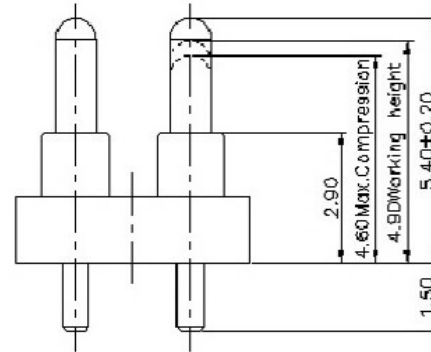

-TOLERANCES-
UNLESS OTHERWISE SPECIFIED
公差参考表

X.	±0.10	X'	±2.00'
XX	±0.05		
XXX	±0.02	X'X'	±1.00'
X.XXX	——		

 广东科斯达开关厂



TITLE:
产品品名: POGO PIN

PRODUCT NO:
产品料号:

APPD: 核准:	王芬利	DATE	SCALE	UNIT	TYPE	PAGE
CHECK: 校对:		2016.11.21	1:1	mm	CD	1/1
DRAW: 绘图:						