
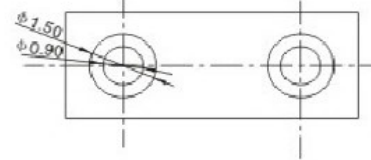
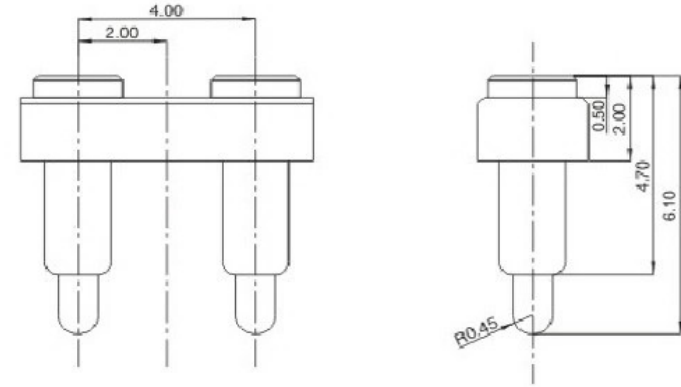


DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
18/12'06			NEW DWG		AO



NOTE:

PRODUCT TO BE MET TYCO SPEC 230-702

1.MATERIAL

HOUSING:PA46 +30%GF,UL94V-0,COLOR:BLACK
 PLUNGER:BRASS,3u" GOLD PLATING 50U" MIN,NICKEL UNDERPLATEE
 BARREL:BRASS,3u" GOLD PLATING OVER 50u"MIN,NICKEL UNDERPLATED
 SPRING:SUS304

2.SPECIFICATION:

ELECTRICAL
 CURRENT RATING:12VDC,1A
 INSULATION RESISTANCE:100m Min
 CONTACT RESISTANCE: 50m Max
ENVIRONMENTAL:
 TEMPERATURE RANGE:40°C ~85°C

3.MECHANICAL FUNCTION:

SPRING PROBE FORCE:
 WORKING STROKE:130g±25g AT 0.9mm RECOMMEND STROE
 MAX.STROKE:1.30mm FULL STROKE.
 DURABILITY:10,000 CYCLES/0.90mm STROKE

1. 材料和电镀

接触头为(斜头)黄铜合金(C3604), 镀镍50-70 μ" 镀金1 μ"
 导管为黄铜合金(C3604), 镀镍50-70 μ" 镀金1 μ"

2. 塑胶材质

PA46+30%玻纤

3. 弹力: 120g±10%

4. 持续工作电流: 1A

5. 工作电压: 12V AC/DC

接触电阻: 30mOhm Max

6. 使用寿命: 20000次

7. 工作温度计: -40°C - 80°C 90% R. H. Max

8. 中性盐雾测试24小时无锈蚀

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参考表		 广东科斯达开关厂				
		 		TITLE: 产品品名: POGO PIN		
		APPD: 核准:		PRODUCT NO: 产品料号:		
		CHECK: 校对:		DATE		
		DRAW: 绘图:		SCALE		
		X ±0.10 X.X ±0.05 X.XX ±0.02 X.XXX _____		X' ±2.00' X.X' ±1.00'		UNIT mm
		王芬利		2016.11.21	1:1	TYPE CD
				PAGE 1/1		