

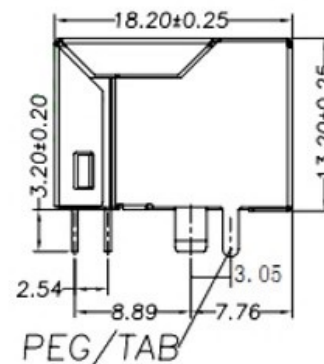





REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE		2018/01/18
B	Modify dimensions		2019/03/22



PEG/TAB



A TYPE (脚前3.05)

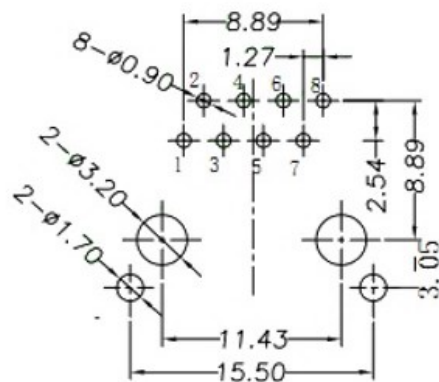

PC Board Layout

NOTES:

ELECTRICAL:

- | | |
|--------------------------|------------------------------------|
| 1. VOLTAGE RATING | : 125 VAC RMS. |
| 2. CURRENT RATING | : 1.5 AMP. |
| 3. CONTACT RESISTANCE | : 30 MILLIOHMS MAX |
| 4. INSULATION RESISTANCE | : 500 MEGOHMS MIN @ 500 VDC. |
| 5. DIELECTRIC STRENGTH | : 1000 VAC RMS 50Hz or 60Hz, 1MTN. |

MECHANICAL:

- | | |
|------------------------------|-------------------------------------------------------------|
| 1. HOUSING & INSERT MATERIAL | : PBT UL94V-0. |
| 2. CONTACT MATERIAL | : DIAMETER 0.45MM PHOSPHOR BRONZE GOLD PLATING OVER NICKEL. |
| 3. SHIELD | : 0.20~0.25MM THICKNESS BRASS WITH NI PLATED. |
| 4. MATING/UNMATING FORCE | : 2.2KG.F MAX. |
| 5. RETENTION STRENGTH | : 7.7KG.F MIN BETWEEN JACK AND PLUG. |
| 6. OPERATING LIFE | : 750 CYCLES MIN. |

ENVIRONMENTAL:

- | | |
|------------------------------------|-----------------------------------------|
| 1. STORAGE | : -40°C ~ +85°C RELATIVE HUMIDITY < 70% |
| 2. OPERATION | : -40°C ~ +85°C |
| 3. IR Reflow Soldering Temperature | : 255 To 265 (5-10 Seconds) |

Mates With Modular Plug conforming To FCC Part 68, Subpart F.



广东科斯达电子科技有限公司
Guangdong Keside Electronic Technology Co., Ltd.
广东科斯达电器开关厂
Guangdong Keside Electrical Switch Factory

DRAW/ DATE	设计: 李金强	SIZE: A4	UNIT: MM	PART. NO: 料号
CHECKED/ DATE	审核: 赵来锋	SCALE: 1:1	PROJECTION	REV.: 版本
APPROVED/ DATE	核准: 赵佰友	DWG. PATH	图号	SHEET: 页码