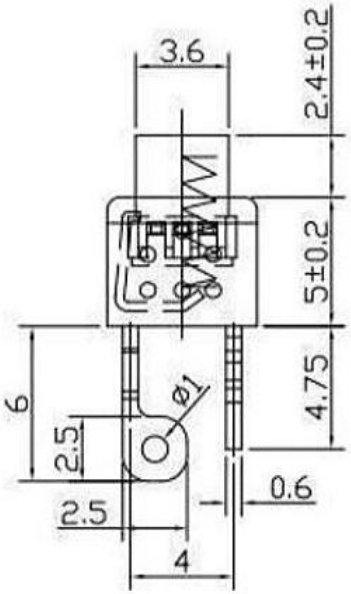


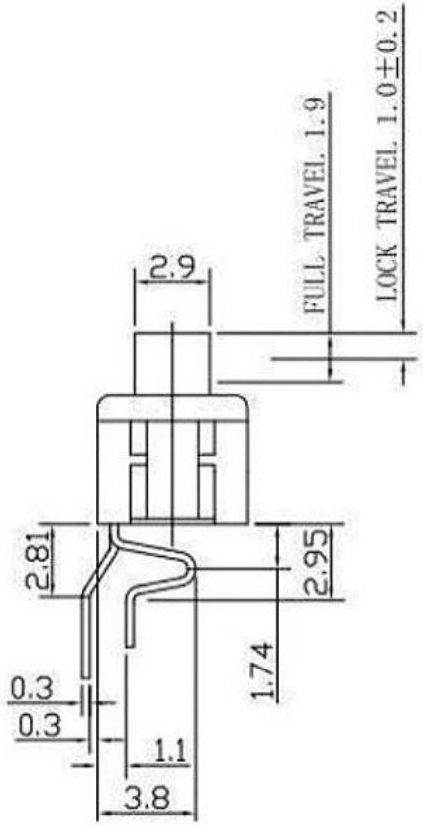


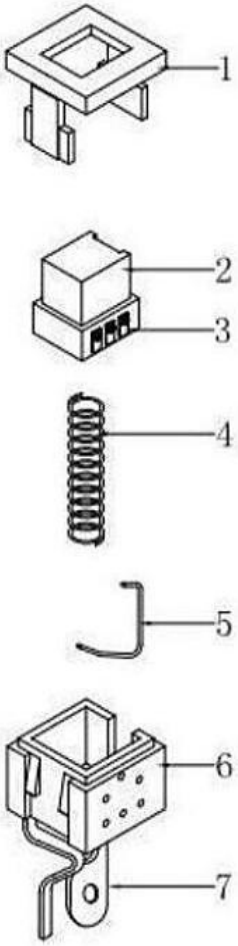





SCHEMATIC (NON-SHORTING)







SPECIFICATIONS

(1)LIFE TEST:10000cycles at a speed of 15-18cycles
(2)CONTACT RESISTANCE:100mΩmax
(3)INSULATION RESISTANCE:100MΩmin
(4)DIELETRIC STRENGTH:250V AC FOR 1MIN
(5)OPERATING TEMPERATURE:-16°C-+60°C
(6)RATING: 0.1A 30V DC
(7)FUNCTION:2P2T
(8)TIMING:NON-SHORTING
(9)OPERATING FORCE:180gf±50gf

| NO. | PARTS | MATERIALS | Q'TY | |
|---|---|---|---|---|
| 8 | | | | |
| 7 | | | | |
| 6 | | | | |
| 5 | SPRING | SUS304 | 1 | NATURAL |
| 4 | CAM STICK | SUS304 | 1 | NATURAL |
| 3 | CASE | PA66/BRASS STRIP | 1 | GREY/Ag PLATED |
| 2 | COVER | PA66+15%F.G | 1 | BLACK |
| 1 | KNOB | PA66+15%F.G/PBS STRIP | 1 | BLACK/Ag CLAD |

TOLERANCE UNLESS SPECIFIED
WITHIN 1.5mm : ±0.1mm
OVER 1.5mm : ±0.2mm

| ISSUE | DATE | DESCRIPTIONS OF REVISION | APPD. |
|---|---|---|---|
| A | 2016-10-14 | 初 版 | |

TITLE : VERTICAL PUSH SWITCH
MODEL:
UNIT : mm
SCALE: 5:1
DRWG NO.:

| | | |
|---|---|---|
| DWN. | | 2016-10-14 |
| CHK'D | | 2016-10-14 |
| APPD. | | |

台灣科斯達電器開關廠
KOSOD SWITCH FACTORY