



A-A

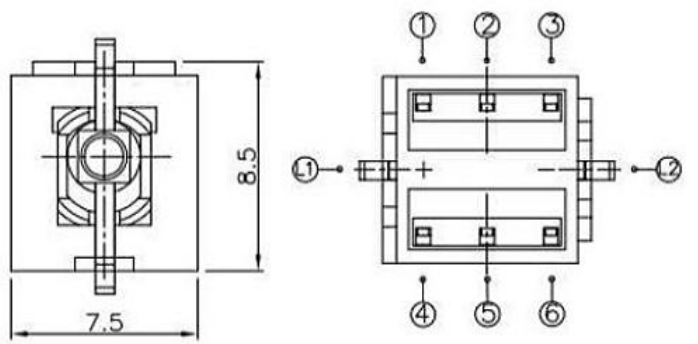

P.C.B LAYOUT

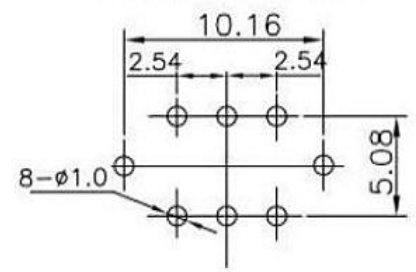

Type	Switch	Action	Circuit
LOCK	Normal ON	Push to lock OFF	
Connectong Terminal	1 - 2 4 - 5	2 - 3 5 - 6	
NO LOCK	Normal ON	Push (ON)	
Connectong Terminal	1 - 2 4 - 5	2 - 3 5 - 6	
LED Circuit			

LED COLOR					
1	2	3	4	5	6
Red	Yellow	Green	Blue	White	Pure Green

SPECIFICATIONS

- (1) LIFE TEST: 10000 cycles at a speed of 15-18 cycles
- (2) CONTACT RESISTANCE: 100mΩ max
- (3) INSULATION RESISTANCE: 100MΩ min
- (4) DIELECTRIC STRENGTH: 250V AC FOR 1MIN
- (5) OPERATING TEMPERATURE: -16°C - +60°C
- (6) RATING: 0.1A 30V DC
- (7) FUNCTION: 2P2T
- (8) TIMING: NON-SHORTING
- (9) OPERATING FORCE: 180gf ± 50gf

8								
7								
6								
5	SPRING	SUS304	1	NATURAL	WITHIN 1.5mm : ±0.1mm	A	2016-10-14	初版
4	CAM STICK	SUS304	1	NATURAL	OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION
3	CASE	PA66/BRASS STRIP	1	GREY/Ag PLATED	TITLE : VERTICAL PUSH SWITCH		UNIT : mm	DRWG NO.:
2	COVER	PA66+15%F.G	1	BLACK	MODEL:		SCALE: 5:1	DWN.
1	KNOB	PA66+15%F.G/PBS STRIP	1	BLACK/Ag CLAD				2016-10-14
NO.	PARTS	MATERIALS	Q'TY				APPD.	