

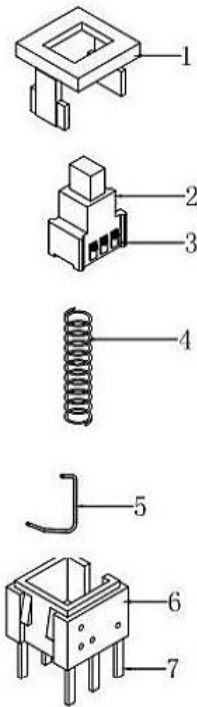


P. C. B LAYOUT



SCHEMATIC (NON-SHORTING)

SPECIFICATIONS

- (1)LIFE TEST:10000cycles at a speed of 15-18cycles
- (2)CONTACT RESISTANCE:100mΩmax
- (3)INSULATION RESISTANCE:100MΩmin
- (4)DIELETRIC STRENGTH:250V AC FOR 1MIN
- (5)OPERATING TEMPERATURE:-16°C-+60°C
- (6)RATING: 0.1A 30V DC
- (7)FUNCTION:2P2T
- (8)TIMING:NON-SHORTING
- (9)OPERATING FORCE:180gf±50gf

| | | | | | | | | | | |
|-----|-----------|-----------------------|------|----------------|------------------------------|-------|------------|--------------------------|--|------------|
| 8 | | | | | | | | | | |
| 7 | | | | | | | | | | |
| 6 | | | | | | | | | | |
| 5 | SPRING | SUS304 | 1 | NATURAL | | | | | | |
| 4 | CAM STICK | SUS304 | 1 | NATURAL | | | | | | |
| 3 | CASE | PA66/BRASS STRIP | 1 | GREY/Ag PLATED | | | | | | |
| 2 | COVER | PA66+15%F.G | 1 | BLACK | | | | | | |
| 1 | KNOB | PA66+15%F.G/PBS STRIP | 1 | BLACK/Ag CLAD | | | | | | |
| NO. | PARTS | MATERIALS | Q'TY | | | | | | | |
| | | | | | TOLERANCE UNLESS SPECIFIED | | | | | |
| | | | | | WITHIN 1.5mm : ±0.1mm | A | 2016-10-14 | 初版 | | |
| | | | | | OVER 1.5mm : ±0.2mm | ISSUE | DATE | DESCRIPTIONS OF REVISION | | APPD. |
| | | | | | TITLE : VERTICAL PUSH SWITCH | | UNIT : mm | DRWG NO.: | | |
| | | | | | MODEL: | | SCALE: 5:1 | DWN. | | 2016-10-14 |
| | | | | | | | | CHK'D | | 2016-10-14 |
| | | | | | | | | APPD. | | |