


P.C.B LAYOUT
TOP VIEW
注：“*”表示关键尺寸(3个).

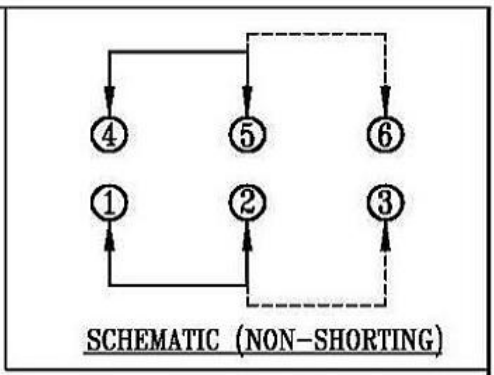

- SPECIFICATIONS**
- (1) LIFE TEST: 10000 cycles at a speed of 15-18 cycles
 - (2) CONTACT RESISTANCE: 100mΩ max
 - (3) INSULATION RESISTANCE: 100MΩ min
 - (4) DIELECTRIC STRENGTH: 250V AC FOR 1MIN
 - (5) OPERATING TEMPERATURE: -16°C - +60°C
 - (6) RATING: 0.1A 30V DC
 - (7) FUNCTION: 2P2T
 - (8) TIMING: NON-SHORTING
 - (9) OPERATING FORCE: 180gf ± 50gf

8										
7										
6										
5	SPRING	SUS304	1	NATURAL						
4	CAM STICK	SUS304	1	NATURAL						
3	CASE	PA66/BRASS STRIP	1	GREY/Ag PLATED						
2	COVER	PA66+15%F.G	1	BLACK						
1	KNOB	PA66+15%F.G/PBS STRIP	1	BLACK/Ag CLAD						
NO.	PARTS	MATERIALS	Q'TY							
					TOLERANCE UNLESS SPECIFIED					
					WITHIN 1.5mm : ±0.1mm	A	2016-10-14	初版		
					OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
					TITLE : VERTICAL PUSH SWITCH			UNIT : mm	DRWG NO.:	
					MODEL:			SCALE: 5:1	DWN.	2016-10-14
									CHK'D	2016-10-14
									APPD.	