



① ② 导行程: 0mm ~ 1.8mm
 ② ③ 导行程: 3.3mm ~ 4.5mm

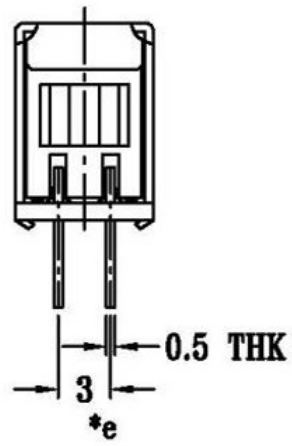

注：“*”表示关键尺寸(6个).

8									
7									
6									
5	SPRING	SUS304	1	NATURAL	TOLERANCE UNLESS SPECIFIED				
4	CAM STICK	SUS304	1	NATURAL	WITHIN 1.5mm : ±0.1mm	A	2016-10-14	初版	
3	CASE	PA66/BRASS STRIP	1	GREY/Ag PLATED	OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
2	COVER	PA66+15%F.G	1	BLACK	TITLE : PUSH SWITCH		UNIT : mm	DRWG NO.:	
1	KNOB	PA66+15%F.G/PBS STRIP	1	BLACK/Ag CLAD	MODEL:		SCALE: 5:1	DWN.	2016-10-14
NO.	PARTS	MATERIALS	Q'TY					CHK'D	2016-10-14
								APPD.	