


# SERIES TL52 SWITCHES



## THRU HOLE TACTILE SWITCH

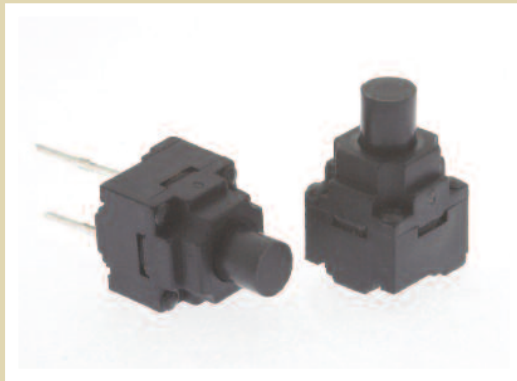

### MECHANICAL SPECIFICATIONS

Mechanical Life:	100,000 cycles
Force:	260 ± 50 gf; 160 ± 50 gf
Travel:	0.3 +0.2/-0.1mm

### ELECTRICAL SPECIFICATIONS

Contact Rating:	50mA @12 VDC
Contact Resistance (Initial Max.):	100 mOhms
Insulation Resistance:	100 MOhms min @100VDC
Dielectric Strength (1 Min.):	250VAC
Bounce:	10m Second Max

### FEATURES & BENEFITS

- Sealed to IP-67 rating
- Radial packaging
- Silver contacts


### APPLICATIONS / MARKETS

- Appliance
- Testing/instrumentation
- Medical

### ENVIRONMENTAL SPECIFICATIONS

Operating Temperature:	-25°C to +85°C
------------------------	----------------

### HOW TO ORDER

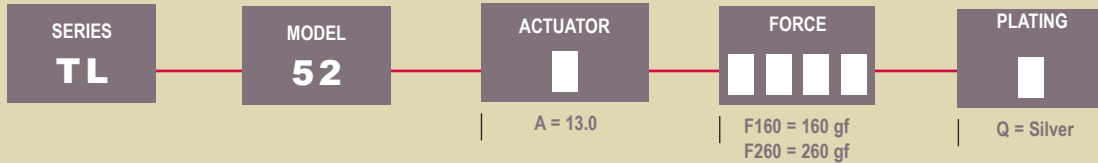

### Example Ordering Number

**TL52AF160Q**

Specifications subject to change without notice.

