




# RSC Series



ROCKER

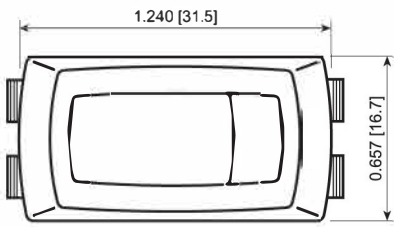

### Panel Cutout




	X	Y
RSC1-Series	1.126 [28.6]	0.547 [13.9]
RSC2-Series	1.071 [27.2]	0.476 [12.1]
RSC3-Series	1.071 [27.2]	0.547 [13.9]
RSC4-Series	1.126 [28.6]	0.476 [12.1]

### Actuator Options




Bi-Color




Flat

### Illumination Options




Full



### Terminal Options



6.3mm Tab (Small Hole) 6.3mm Tab (Large Hole) 4.8mm Tab



Solder Solder (Low Clearance)

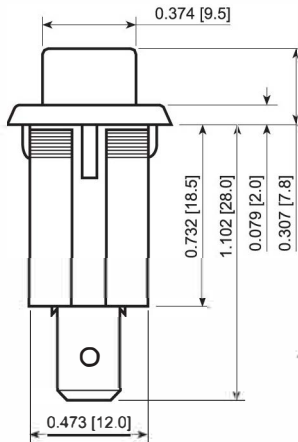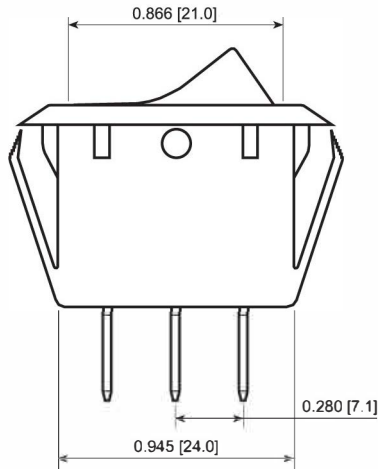

### FEATURES:

- Excellent Quality and Reliability
- 4 Bodies to Cover Many Popular Cutouts
- High Current Capacity
- Illuminated and Bi-Color Actuators

### SPECIFICATIONS:

RATING: RATING OPTION D:

- 20A 125VAC [UL, CSA]
- 16A 250VAC [UL, CSA]
- 1/4HP 125VAC [UL]
- 3/4HP 250VAC [UL]

RATING OPTION C:

- 15A 125VAC [UL, CSA]

TEMPERATURE: -20°C to 65°C [UL, CSA]  
-20°C to 105°C [UL, CSA]

ELECTRICAL LIFE: 10,000 Cycles  
CONTACT RESISTANCE: 20mΩ Max. at 1A 5VDC  
INSULATION RESISTANCE: 100MΩ Min. at 500VDC  
DIELECTRIC STRENGTH: 1,000VAC for 1 Minute



RSC341D1123



RSC241D2200



RSC241D125Z11

RSC141D1A24

RSC141D1021-116

Series	Terminal	Function	Rating	Body Color	Actuator Color	Marking Color	Marking Type	Lens Style	Lens Color	Lamp Voltage
<div style="display: flex; gap: 5px;"> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> </div>	<div style="display: flex; gap: 5px;"> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> </div>	<div style="display: flex; gap: 5px;"> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> </div>	<div style="display: flex; gap: 5px;"> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> </div>	<div style="display: flex; gap: 5px;"> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> </div>	<div style="display: flex; gap: 5px;"> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> </div>	<div style="display: flex; gap: 5px;"> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> </div>	<div style="display: flex; gap: 5px;"> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> </div>	<div style="display: flex; gap: 5px;"> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> </div>	<div style="display: flex; gap: 5px;"> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> </div>	<div style="display: flex; gap: 5px;"> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> <div style="width: 15px; height: 15px; border: 1px solid black;"></div> </div>
<b>Curved Actuators:</b> RSC1 - 28.6 x 13.9 Cutout RSC2 - 27.2 x 12.1 Cutout RSC3 - 27.2 x 13.9 Cutout RSC4 - 28.6 x 12.1 Cutout	1 - 4.8mm Tab 4 - 6.3mm Tab (Small Hole) 5 - Solder 9 - 6.3mm Tab (Large Hole) C - Solder (Low Clearance)	1 - Off-On (*) 3 - On-On 4 - Off-(On) 5 - On-Off-On A - On-(Off) B - On-(On) C - On-Off-(On)	C - 15A 125V D - 20A 125V	1 - Black 2 - White 3 - Almond 4 - Grey 9 - Red	0 - Full Illum. 1 - Black 2 - White 3 - Almond 4 - Grey 5 - Orange 7 - Blue 8 - Green 9 - Red	0 - None 1 - Black 2 - White 3 - Almond 4 - Grey 5 - Orange 7 - Blue 8 - Green 9 - Red	0 - None 1 - I/O Vert. 2 - ON/OFF/ON Vert. 3 - ON/OFF Vert. 4 - ON/OFF Horiz. 9 - I/O/I Horiz. R - I/O Horiz. S - I/O/I Vert.	1 - Full	0 - Clear 1 - Red 2 - Amber 3 - Green 4 - Blue	3 - 6V 4 - 12V 5 - 24V 6 - 125V 7 - 250V

Note:  
\* = Option Available with Illumination

Bi-Color:  
A - Black / Red  
B - Black / White  
C - White / Red

Custom Colors and Markings Available Upon Request For Illuminated Switches Only

### EXAMPLE PART NUMBERS:

- RSC141D1000-126 1P Off-On Black Body, Amber Illum. Actuator, 125V
- RSC141D1100 1P Off-On Black Body/Actuator, No Marking
- RSC141D1121 1P Off-On Black Body/Actuator, I/O Vert.
- RSC141D2200 1P Off-On White Body/Actuator, No Marking



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE 11.16.2021