



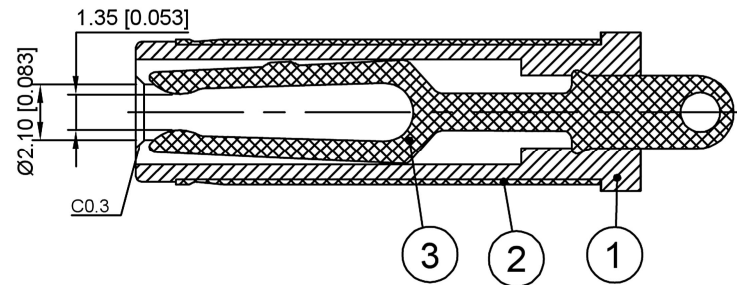

Technolo Request:

- 1.Outlook:
NO burr,no hurt.
- 2.Electronic performance:
a:Insulation resistance:
Above DC500V/100MΩ ;
b:Endure voltage:
AC500V at 1 minute;
c:Contact resistance:
Under 30MΩ ;
- 3.Insertion fore & withdrawal force;0.3-3kgf.
- 4.Salt spray test :24H.
- 5.Meet RoHS.
- 6.Remark * is important specification



	MATERIAL	PLATING
Terminal	phosphor bronze	NI
Fork hook tube	H65	NI
Plastic	Pbt	Black

				ANGLAR	±5°	 SWITCH CONNECTOR	DSND		SCALE: N/A	MODEL TYPE: DC PLUG
				L ≤ 4	±0.2		DWN		VIEW: 	PART NO.: DT-2255521
				4 < L ≤ 16	±0.3		CHKD		UNIT: mm/in	DWG NO.:
				16 < L ≤ 63	±0.4		APPD		SIZE: A4	
				L > 63	±0.5					
REVISIONS				UNSPECIFIED TOLERANCES						
WWW.BODONGKAIGUAN.NET WWW.CKJACK.COM WWW.KSDKG.COM				KE SI DA ELECTRONIC TECHNOLOGY CO., LTD				WEIGHT	SHEET	REVISION
									1/1	A0