

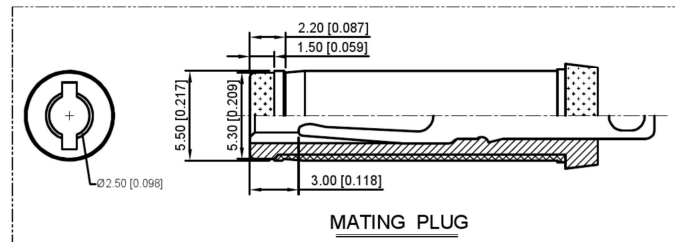
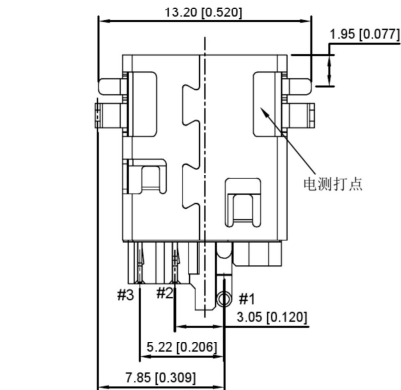
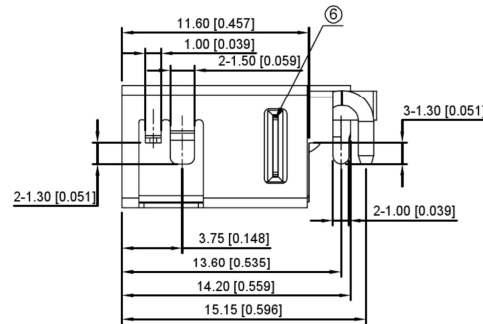


PCB LAYOUT TOP VIEW  
TOLERANCES: ±0.05

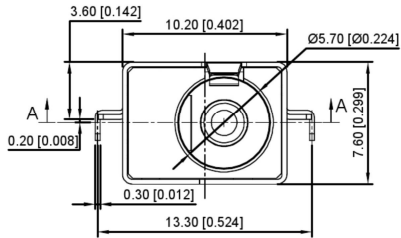

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS
  - 1-1. RATING: DC 20V, 10A Min
  - 1-2. CONTACT RESISTANCE: 30MΩ Max. (INITIAL)
  - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
  - 1-4. INSULATION RESISTANCE: 100 MΩ Min. MEASURED BY 500V DC.
2. MECHANICAL CHARACTERISTICS
  - 2-1. INSERTION FORCE: 3.0 KGF Max.
  - 2-2. WITHDRAWAL FORCE: 0.35 KGF Min.
  - 3. LIFE TEST: 5000 CYCLES MIN.

NO.	PART NAME	QTY	MATERIAL (THICK)	PLATING (COLOR)
⑥	TERMINAL	1	SUS301	N/A
⑤	SHELL	1	C2680R-EH	Ni 50U
④	CENTER PIN(+)	1	C3601	Gold Flash Over Ni 50U
③	SHUNT TERMINAL	1	C2680E-EH	Gold Flash On Contact Area: 100U, Sn On Solder Tail All Over Ni 50U Min.
②	TIP SPRING(-)	1	C5210R-EH	
①	HOUSING	1	LCP UL 94V-0(HF)	BLACK

REVISIONS				ANGULAR	±5°	DSND	SCALE: N/A	MODEL TYPE:		
				L ≤ 4	±0.2	DWN	VIEW:	DC POWER JACK		
				4 < L ≤ 16	±0.3	CHKD	UNIT: mm/in	PART NO.: DC-011D-10A-2.5		
				16 < L ≤ 63	±0.4	APPD	SIZE: A4	DWG NO.:		
				L > 63	±0.5					
				UNSPECIFIED TOLERANCES						
KE SI DA ELECTRONIC TECHNOLOGY CO., LTD								WEIGHT	SHEET	REVISION
WWW.BODONGKAIGUAN.NET WWW.CKJACK.COM WWW.KSDKG.COM								1/1	A0	