


SCHEMATIC

SS13D75- X

L(MM)
2 ~ 10

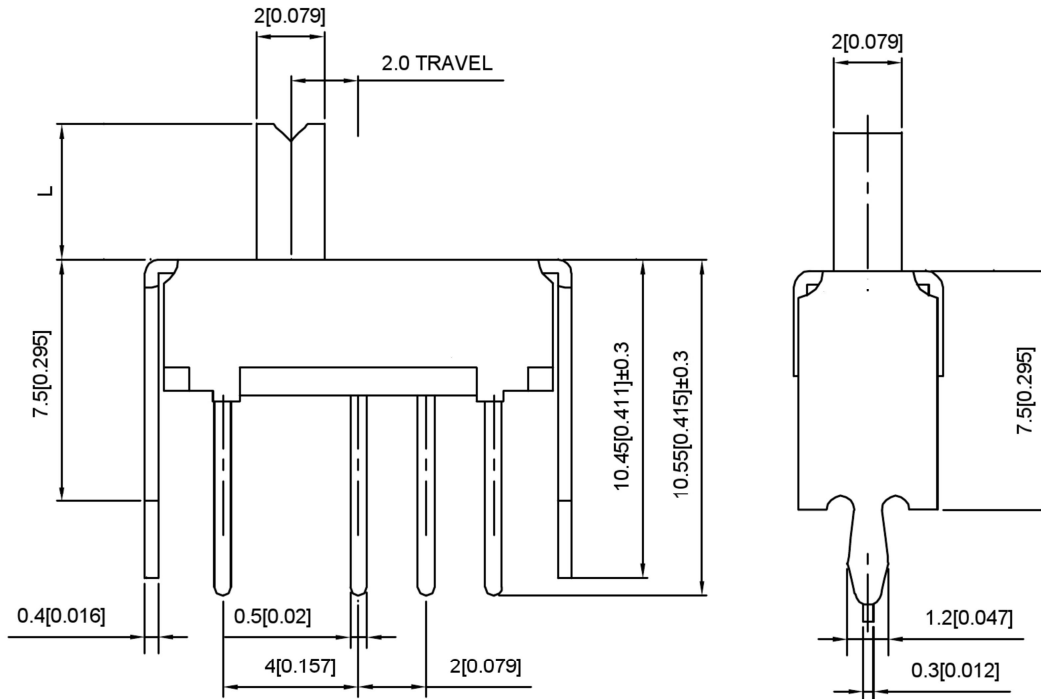

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISITANCE	100MΩ MAX
TRAVEL	2MM
OPERATING FORCE	250±100gf
OPERATING LIFE	10000

ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK
⑤	Terminal	—	4	Brass (0.30t)	ag Plated	—
④	Contact spring	—	1	Beryllium copper		—
③	Base	—	1	LCP		—
②	Cover	—	1	SUS	Tin plated	—
①	Keystake	—	1	PA46		—

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
				ANGULAR ±5°
				L ≤ 4 ±0.2
				4 < L ≤ 16 ±0.3
				16 < L ≤ 63 ±0.4
				L > 63 ±0.5

WWW.BODONGKAIGUAN.NET WWW.CKJACK.COM WWW.KSDKG.COM

KSD
SWITCH CONNECTOR

DSND	SCALE: N/A	MODEL TYPE: SLIDE SWITCH
DWN	VIEW:	PART NO.: SS13D75
CHKD	UNIT: mm/in	DWG NO.:
APPD	SIZE: A4	

KE SI DA ELECTRONIC TECHNOLOGY CO., LTD	WEIGHT	SHEET	REVISION
		1/1	A0