

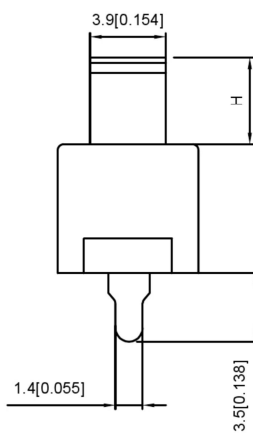


Specification:

1. Rating: 6A 120VAC
2. Contact resistance: $\leq 30 \text{ m}\Omega$
3. Insulation resistance: $\geq 100 \text{ M}\Omega$ (DC 500V/Min)
4. Electronics life: > 10000 cycles
5. Operation force: $250 \pm 100 \text{ gf}$

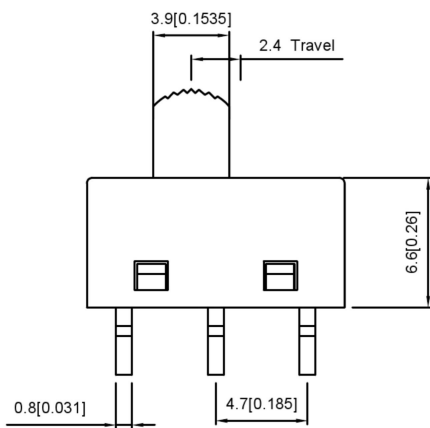

SS-12M11 X X

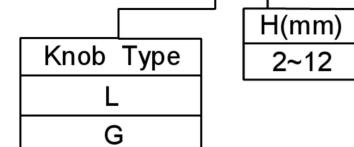

Function		
ON	NA	ON

				ANGLAR	$\pm 5^\circ$	 SWITCH CONNECTOR	DSND		SCALE: N/A	MODEL TYPE: SLIDE SWITCH			
				$L \leq 4$	± 0.2		DWN		VIEW:	PART NO.: SS-12M11XX			
				$4 < L \leq 16$	± 0.3		CHKD		UNIT: mm/in	DWG NO.:			
				$16 < L \leq 63$	± 0.4		APPD		SIZE: A4				
				$L > 63$	± 0.5	UNSPECIFIED TOLERANCES				WEIGHT	SHEET	REVISION	
REVISIONS				DATE	REVISED	APPROVED	KE SI DA ELECTRONIC TECHNOLOGY CO., LTD				1/1	A0	
WWW.BODONGKAIGUAN.NET				WWW.CKJACK.COM		WWW.KSDKG.COM							