

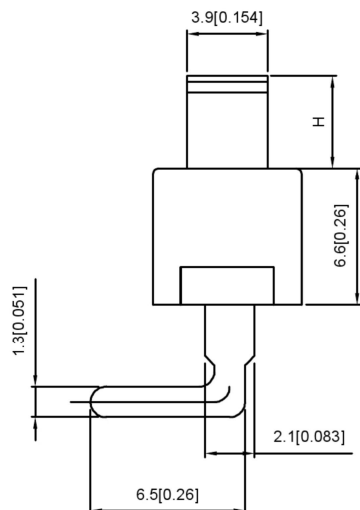


Specification:

1. Rating: 6A 120VAC
2. Contact resistance:  $\leq 30 \text{ m}\Omega$
3. Insulation resistance:  $\geq 100 \text{ M}\Omega$  (DC 500V/Min)
4. Electronics life:  $> 10000$  cycles
5. Operation force:  $250 \pm 100 \text{ gf}$

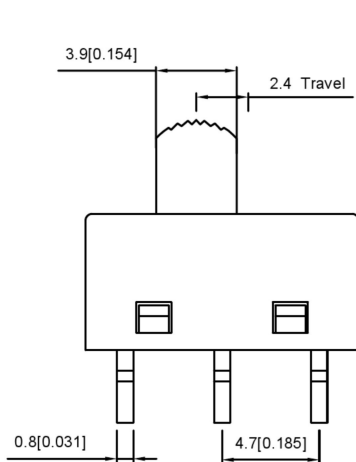

SS-12M12 X X



Function		
ON	NA	ON
	/	

				ANGULAR	$\pm 5^\circ$	DSND		SCALE: N/A	MODEL TYPE: SLIDE SWITCH		
				$L \leq 4$	$\pm 0.2$	DWN		VIEW:	PART NO.: SS-12M12XX		
				$4 < L \leq 16$	$\pm 0.3$	CHKD		UNIT: mm/in	DWG NO.:		
				$16 < L \leq 63$	$\pm 0.4$	APPD		SIZE: A4			
				$L > 63$	$\pm 0.5$				WEIGHT	SHEET	REVISION
REVISIONS				UNSPECIFIED TOLERANCES			KE SI DA ELECTRONIC TECHNOLOGY CO., LTD			1/1	A0
WWW.BODONGKAIGUAN.NET				WWW.CKJACK.COM			WWW.KSDKG.COM				