




NOTES:

1.ELECTRICALCHARACTERS:

- 1-1.RATING:DC 30V 0.5A;
- 1-2.CONTATCT RESISTANCE:<30mΩ;
- 1-3.INSULATION RESISTANCE:>100MΩ DC500V;
- 1-4.WITHSTANDING VOLTAGE:AC 500V 1min;
- 1-5.LIFE:5.000CYCLES;

2.MECHANICALCHARACTERISTICS:

- 2-1.INSERTION&EXTRACTION FORCE:3~30N;
- 2-2.OPERATING TEMPERATURE:-30°C~+70°C;

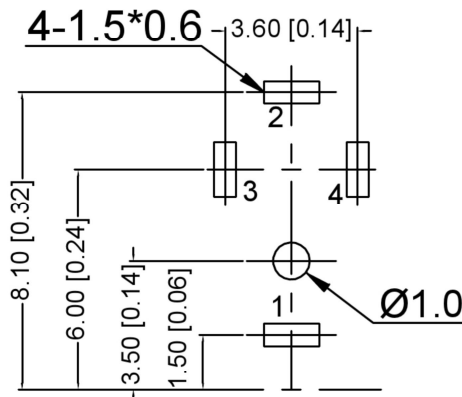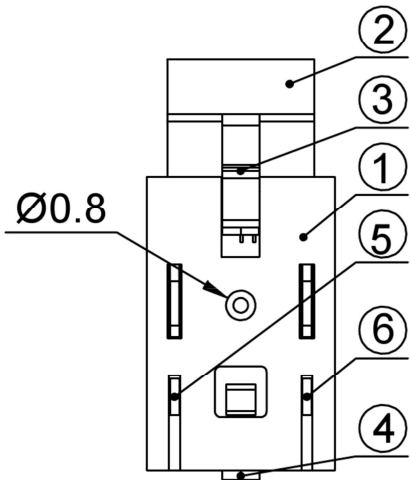

PCB HOLES(TOP VIEW)
GENERAL TOLERANCE:0.1MM

⑤	TERMINAL	4	1	Manganese steel t=0.25	SnSb	PLATED
④	TERMINAL	3	1	Manganese steel t=0.25	SnSb	PLATED
③	TERMINAL	2	1	Manganese steel t=0.25	SnSb	PLATED
②	AXLE SLEEVE	1		H59	CuSn	PLATED
①	HOUSING	1		PA66		BLACK

REVISIONS				DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	SCALE: N/A	MODEL TYPE: 2.5 PHONE JACI
							ANGULAR ±5°			
							L ≤ 4 ±0.2	DWN	VIEW:	PART NO.: PJ-210B
							4 < L ≤ 16 ±0.3	CHKD	UNIT: mm/in	DWG NO.:
							16 < L ≤ 63 ±0.4	APPD	SIZE: A4	
							L > 63 ±0.5			
WWW.BODONGKAIGUAN.NET WWW.CKJACK.COM WWW.KSDKG.COM								KE SI DA ELECTRONIC TECHNOLOGY CO., LTD		WEIGHT SHEET REVISION 1/1 A0

KSD
SWITCH CONNECTOR