


**PCB LAYOUT BOTTOM VIEW**  
TOLERANCES:±0.05

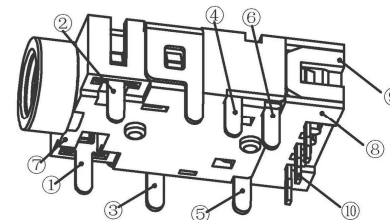

**SPECIFICATIONS:**

规格:

**ELECTRICALCHARACTERS:**

电气特性:

- 1-1.RATING:20V, 1A Min.  
额定值:20V, 1A Min
- 1-2.CONTACT RESISTANCE  
接触电阻  
50 MILLIOHMS Max. FOR INITIAL  
初始电流最大值为50毫欧姆  
80 MILLIOHMS Max AFTER 5000 CYCLES  
5000次循环后最大为80毫欧姆
- 1-3.INSULATION RESISTANCE:100 MEGAOHMS Min.  
BY 500V DC AFTER I MINUTE.  
绝缘电阻: 一分钟后, 500V DC的最小电阻为100兆欧姆
- 1-4. DIELECTRIC WITHSTANDING VOLTAGE500VRMS  
AFTER I MINUTE  
一分钟后的介电耐受电压500Vrms
- 2.MECHANICAL CHARACTERISTICS:  
机械特性:
- 2-1.INSERTION FORCE:0.3~3.0 KGF2.94~29.4N)  
插入力: 0.3~3.0 KGF(2.94~29.4N)
- 2-2. WITHDRAWAL FORCE:0.3~3.0KGF(2.94~29.4N)  
拔出力: 0.3~3.0KGF (2.94~29.4N)
- 3. LIFE TEST:5.000 CYCLES MIN.  
寿命试验: 至少5.000次循环。

⑩	DRIVE IC TX	1	N/A	N/A
⑨	COVER2	1	HIGH TEMP. THERMOPLASTIC	Black
⑧	COVER1	1	HIGH TEMP. THERMOPLASTIC	Black
⑦	HOUSING	1	HIGH TEMP. THERMOPLASTIC	Black
⑥	TERMINAL 6#	1	COPPER ALLOY t=0, 25	Au-Plated
⑤	TERMINAL 5#	1	COPPER ALLOY t=0, 30	Au-Plated
④	TERMINAL 4#	1	COPPER ALLOY t=0, 20	Au-Plated
③	TERMINAL 3#	1	COPPER ALLOY t=0, 20	Au-Plated
②	TERMINAL 2#	1	COPPER ALLOY t=0, 20	Au-Plated
①	TERMINAL 1#	1	COPPER ALLOY t=0, 20	Au-Plated
No.	PART NAME	QTY	MATERIAL(THICK)	PLATING(COLOR)

REVISIONS					DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	SCALE: N/A	MODEL TYPE: ERAPHONE SOCKET			
									DWN	VIEW:	PART NO.: PJ-397D			
									CHKD	UNIT: mm/in	DWG NO.:			
									APPD	SIZE: A4		WEIGHT	SHEET	REVISION
												1/1	A0	

**KSD**  
SWITCH CONNECTOR

**KE SI DA ELECTRONIC TECHNOLOGY CO., LTD**