



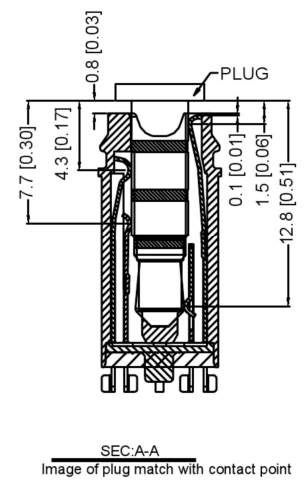
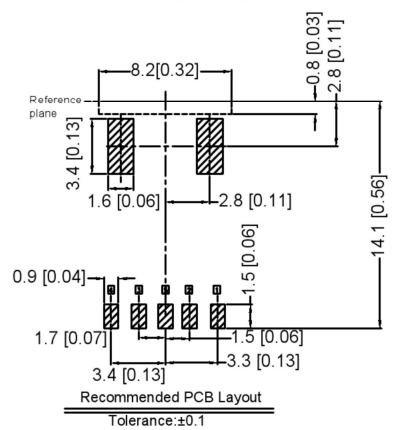



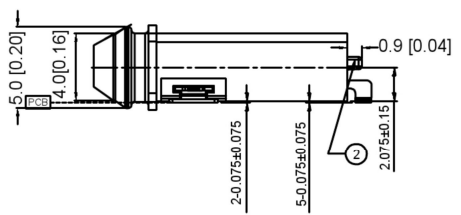


ROHS COMPLIED



- SPECIFIATIINS:
- 1.INSULATION RESISTANCEA VOLTAGE OF 500V D.C. SHALL BE APPLIED TO THE TERMINALS AFTER WHICH MEASUREMENT SHALL BE MADE A GAUGE FIR THE MEASVREMENT SHALL BE USED THE INSVLATED GAUGE
 - 2.CONTACT RESISTANCE:30mA IR LESS
 - 3.VILTAGEPR01F:500V AC FOR ONE MINUTE
 - 4.DURABILITY:10000 INSERTION/REMOVAL CYCLES(MINIMUM)
 - 5.INSETION FORCE:0.4KGF-2.0KCF
 - 6.WITHDRAWALFIRCE:0.4KGF~2.0KGF
 - 7.WATER PROFNESS:THIS PRODUCT IS CINFIRM To JIS STANDARD IPX7 BY WATERPROIF JACK
 - 8.USING PLUG:43.5MM、 4-PILE STERE1 EARPINE(LCH/RCH/GND/MIC) PRIVIDED THAT THEY CINFIRM TI VIS C6560
 - 9.1VAL RING
 - 9-1.Hordness of silicane rudder:70'

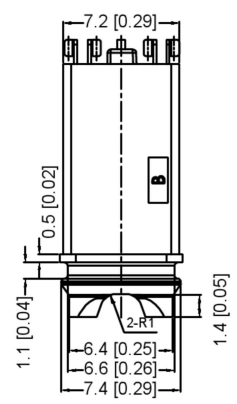

SEC:B-B
Image of plug match with contact point

⑩	OVAL RING	----	1	SILICONE
⑨	BOND	----	1	----
⑧	TERMINAL	----	2	C2680 (t=0.2)
⑦	TIP SPRING-2	⑤	1	Ti-Cut=0.2
⑥	RING SPRING-2	④	1	Ti-Cut=0.2
⑤	RING SPRING-1	③	1	Ti-Cut=0.2
④	TIP SPRING-1	②	1	Ti-Cut=0.2
③	EARTH SPRING	①	1	Ti-Cut=0.2
②	COVER	----	1	PA9T(BLACK)
①	HOUSING	----	1	PA9T(BLACK)
ITEM	PART NAME	TERMINAL	QTY	MATERIAL

				ANGLAR	±5°		DSND		SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK		
				L ≤ 4	±0.2		DWN		VIEW:	PART NO.: PJ-3255A		
				4 < L ≤ 16	±0.3		CHKD		UNIT: mm/in	DWG NO.:		
				16 < L ≤ 63	±0.4		APPD		SIZE: A4			
				L > 63	±0.5							
REVISIONS						UNSPECIFIED TOLERANCES	KE SI DA ELECTRONIC TECHNOLOGY CO., LTD			WEIGHT	SHEET	REVISION
WWW.BODONGKAIGUAN.NET										1/1	A0	
WWW.CKJACK.COM												
WWW.KSDKG.COM												