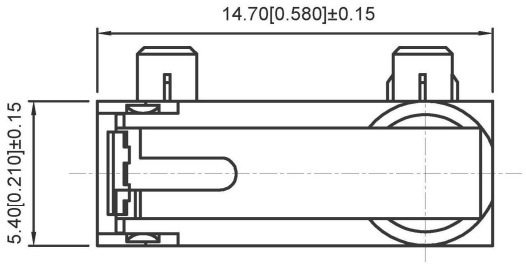

Circuit diagram



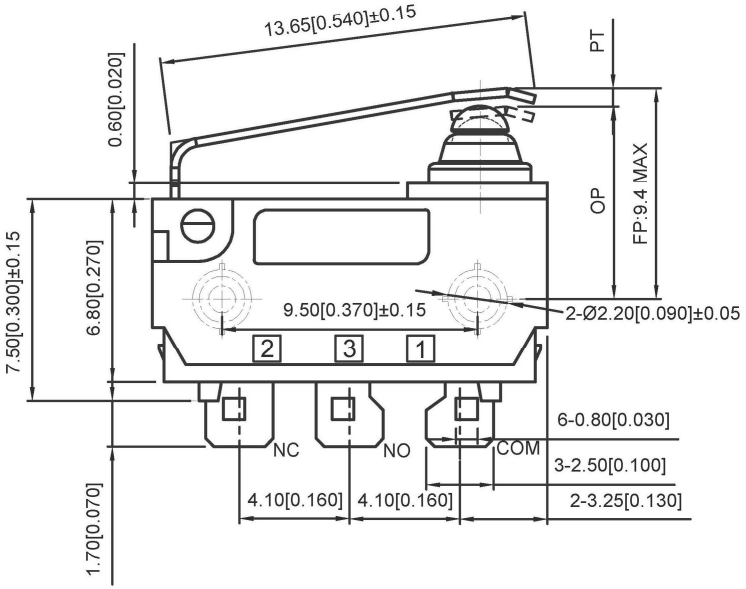

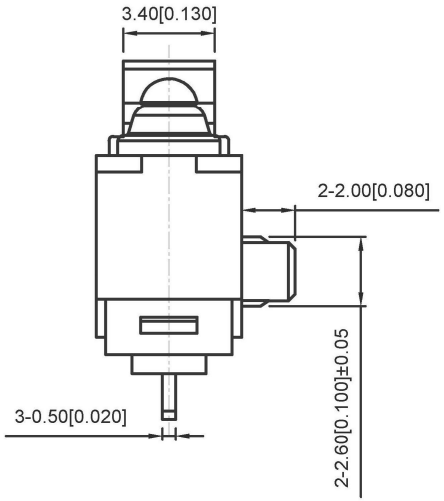

Technical Parameters

1.Electrical Rating: 0.1A 125/250VAC
3A/12VDC;0.1A/48VDC
2.Electrical lifetime:100 000
3.Mechanical lifetime:100 000
4.Contact Resistance：≤50mΩ
5.Operating force:2.2N MAX
6.Pretravel:3.0mm MAX
7.Withstand Voltage:Feet and Feet 500V/5S/5mA
Feet and Shell 1500/5S/5mA
8.Insulation Resistance:≥100MΩ(Test Voltage 500VDC)
9.Proof Tracking Index(PTI):175V
10.Ambient temperature:40T85°
11.Operation Position:7.1±0.5

1	Rubber shell	PA66
2	seal ring	Silica gel
3	base	Brass+PA66
4	According to sincerity	POM
5	Contact moving plate	C5191+AgNi10
6	Strut	SUS301-H

Waterproof grade:IP67

				ANGLAR	±5°
				L≤ 4	±0.2
				4<L≤ 16	±0.3
				16<L≤ 63	±0.4
	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	

WWW.BODONGKAIGUAN.NET WWW.CKJACK.COM WWW.KSDKG.COM

KSD SWITCH CONNECTOR

KE SI DA ELECTRONIC TECHNOLOGY CO., LTD

DSND		SCALE: N/A	MODEL TYPE: Microswitch
DWN		VIEW:	PART NO.: DF1-1365UNY-1
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

WEIGHT	SHEET	REVISION
	1/1	A0