
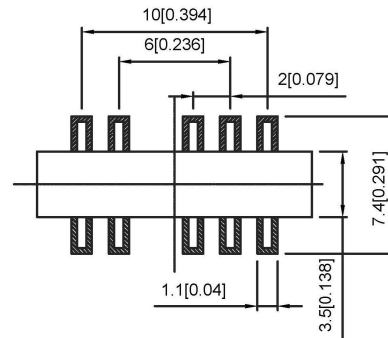




RATING	0.5A 12V DC
CIRCUIT	2P4T
CONTACT RESISTANCE	100m MAX
TRAVEL	2mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10 000

PCB Position and Size

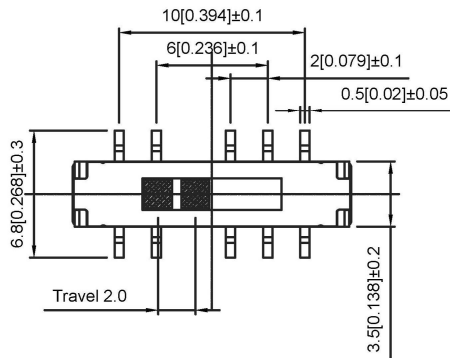

PAPT NO	L
SS-3456S-02-L1	2.0
SS-3456S-02-L2	3.0
SS-3456S-02-L3	4.0

The circuit principle diagram



ITEM	PAPT NAME	TER,NO	QTY	MATERIAL	FINISHING	REMARK
4	Terminal	4	4	Phosphor copper	ag Plated	
3	Base	1	1	LCP		
2	Cover	1	1	Sus	Natural	
1	Keystake	1	1	Pa66	Black	

REVISIONS				ANGULAR	±5°	DSND	SCALE: N/A	MODEL TYPE:		
				L ≤ 4	±0.2	DWN	VIEW:	SLIDE SWITCH		
				4 < L ≤ 16	±0.3	CHKD	UNIT: mm/in	PART NO.: SS-3456S-02-X		
				16 < L ≤ 63	±0.4	APPD	SIZE: A4	DWG NO.:		
				L > 63	±0.5					
				UNSPECIFIED TOLERANCES						
<p style="text-align: center;">KE SI DA ELECTRONIC TECHNOLOGY CO., LTD</p>								WEIGHT	SHEET	REVISION
<p style="text-align: center;">WWW.BODONGKAIGUAN.NET WWW.CKJACK.COM WWW.KSDKG.COM</p>								1/1	A0	