




P.C.B LAYOUT
TOP VIEW




SPECIFICATION

规格

1. Rating : DC 30V 0.5A;
额定值: DC 30V 0.5A;
2. Contact resistance : $\leq 0.03\Omega$;
接触电阻: $\leq 0.03\Omega$
3. Insulation resistance : $\geq 100M\Omega$ (DC250V);
绝缘电阻: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage : 500VAC ;
耐压电压: 500VAC
5. Insertion and extraction force : 3-20N;
插拔力: 3-20N;
6. life test : 5,000 cycles
寿命测试: 5000次循环

SCHMATIC

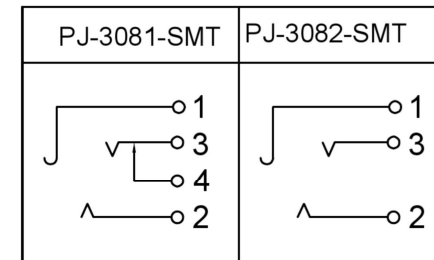

		MATERIAL	PLATING
5	HOUSING	1 PA9T	
4	4# CONTACT FOOT	1 BRASS	Ag-Plating
3	3# CONTACT FOOT	1 BRONZE	Ag-Plating
2	2# CONTACT FOOT	1 BRONZE	Ag-Plating
1	1# CONTACT FOOT	1 BRONZE	Ag-Plating

REVISIONS				DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK		
							ANGULAR $\pm 5^\circ$	DWN <td>VIEW: </td> <td>PART NO.: PJ-308X-SMT</td>	VIEW:	PART NO.: PJ-308X-SMT		
							$L \leq 4$ ± 0.2	CHKD <td>UNIT: mm/in <td>DWG NO.:</td> </td>	UNIT: mm/in <td>DWG NO.:</td>	DWG NO.:		
							$4 < L \leq 16$ ± 0.3	APPD <td>SIZE: A4 <td></td> </td>	SIZE: A4 <td></td>			
							$16 < L \leq 63$ ± 0.4					
							$L > 63$ ± 0.5					
WWW.BODONGKAIGUAN.NET WWW.CKJACK.COM WWW.KSDKG.COM								KE SI DA ELECTRONIC TECHNOLOGY CO., LTD		WEIGHT	SHEET	REVISION
											1/1	A0