
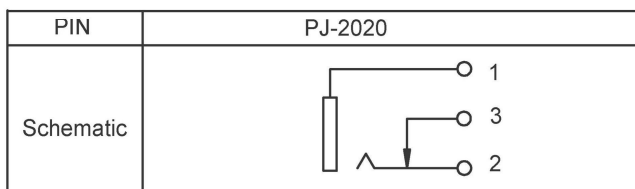


SPECIFICATION

产品规格

1. Rating: DC 30V 0.5A
额定值: DC 30V 0.5A
2. Contact resistance : <0.03 ;
接触电阻: <0.03 ;
3. Insulation resistance: >100MΩ(DC250V)
绝缘电阻: >100MΩ(DC250V)
4. Withstand voltage : 500VAC ;
耐受电压: 500VAC ;
5. Insertion and extraction force: 3-20N ;
插拔力: 3-20N ;
6. life test: 5,000 cycles.
寿命试验: 5000次循环.

PCB

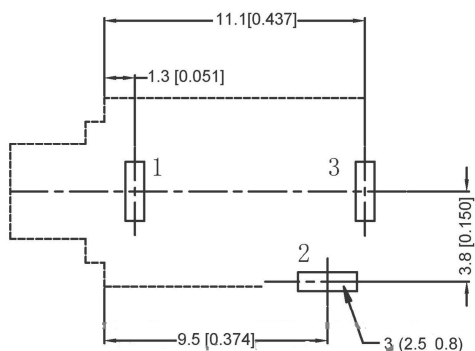

	MATERIAL	PLATING
terminal 1	copper alloy	silver
terminal 2	copper alloy	silver
terminal 3	copper alloy	silver
terminal 4	copper alloy	silver
plastic	PA10T	

REVISIONS				DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	SCALE: N/A	MODEL TYPE: 3.5 PHONE JACK		
							ANGLAR					
							L ≤ 4	±5°				
							4 < L ≤ 16	±0.2	VIEW:	PART NO.: PJ-2020		
							16 < L ≤ 63	±0.3	UNIT: mm/in	DWG NO.:		
							L > 63	±0.4	SIZE: A4			
								APPD				
										WEIGHT	SHEET	REVISION
										KE SI DA ELECTRONIC TECHNOLOGY CO., LTD		1/1