

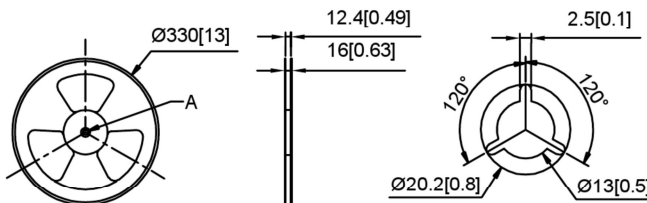
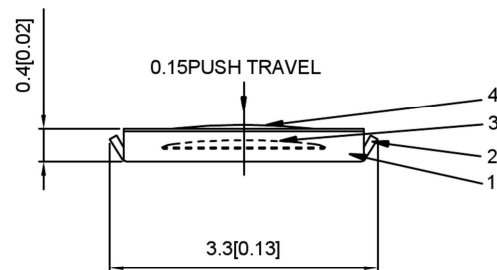



1. RATING: DC 12V, 50mA Max
2. TRAVEL: 0.15±0.05mm
3. LIFE: 300,000cycles
4. PACKAGE: 5000Pcs/Reel

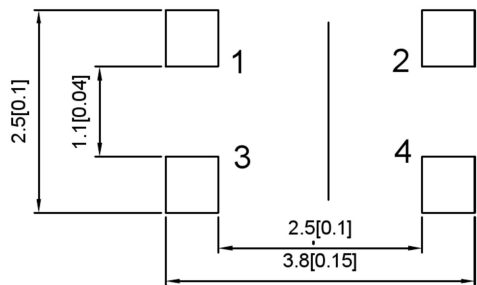

PAPT NO	TS-2630A-X
Operating Force	B:200gf C:260gf
Height	H:0.45

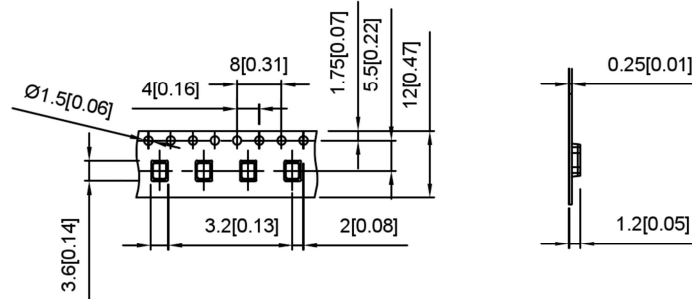

PAD Layout



CIRCUIT DIAGRAM

⑤	Terminal	—	4	Brass (0.30t)	AG Plated	—
④	Contact	—	2	F.ag/Sus		—
③	Base	—	1	LCP		—
②	Cover	—	1	Kapton	Tin plated	—
①	Keystake	—	1	PET		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

				ANGLAR	±5°		DSND		SCALE: N/A	MODEL TYPE: TACT SWITCH		
				L ≤ 4	±0.2		DWN		VIEW:	PART NO.: TS-2630A-X		
				4 < L ≤ 16	±0.3		CHKD		UNIT: mm/in	DWG NO.:		
				16 < L ≤ 63	±0.4		APPD		SIZE: A4			
				L > 63	±0.5							
				UNSPECIFIED TOLERANCES			KE SI DA ELECTRONIC TECHNOLOGY CO., LTD			WEIGHT	SHEET	REVISI
DATE			REVISED	APPROVED						1/1	A0	
WWW.BODONGKAIGUAN.NET			WWW.CKJACK.COM	WWW.KSDKG.COM								