

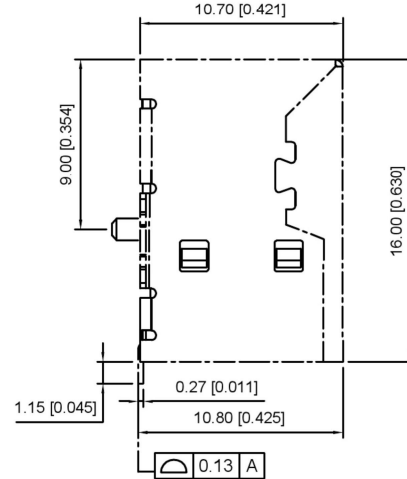


U241-04XN-2XS1-002

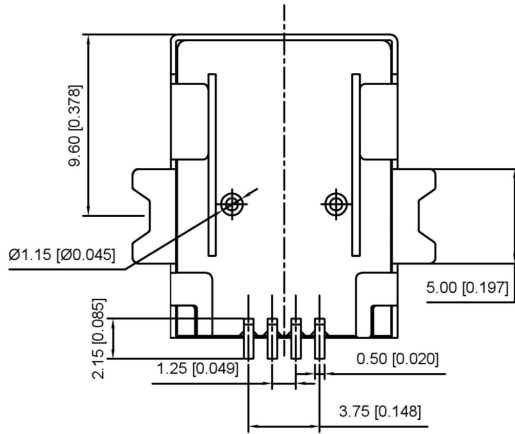

1: Au 1U" MIN
2: Au 15U" MIN
3: Au 30U" MIN

1: WITH
2: WITHOUT

B: BLACK
U: BLUE
W: WHITE
C: CREAM-COLOR

1: PBT
2: LCP
3: PA

Specifications:

Current Rating: 1.0A AC,DC

Voltage Rating: 30V AC,DC

Contact Resistance: 30m Ohm Max

Insulation Resistance: 1,000M Ohm Min

Withstanding Voltage: 500V AC/Minute

Operating Temperature Range: -40°C to +105°C

Materials:

Insulator: Nylon 9T UL94V-0, COLRO: Nature



Contact: Phosphor Bronze

Plating: Au Plated on Contact Area,



Tin Plated on Solder Tail.

Ni Plated on Under overall.

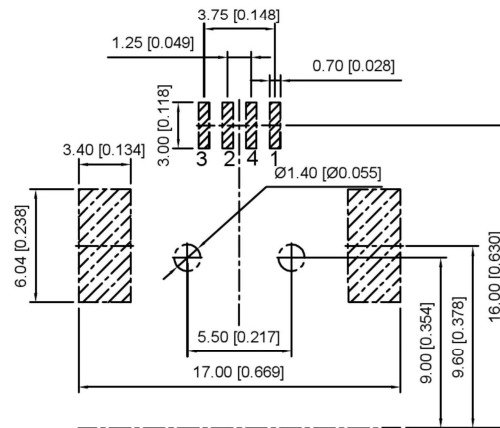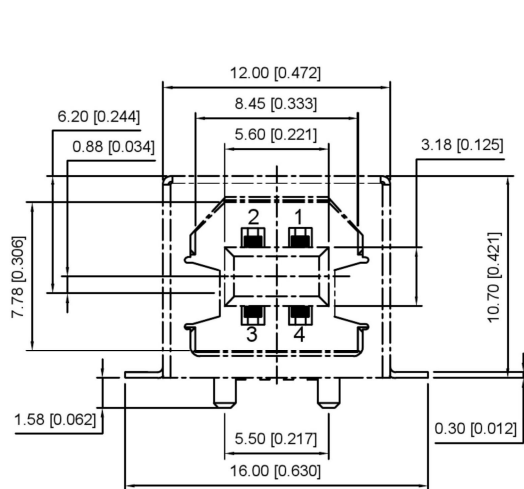Shell: Brass, Nickel Plated



RECOMMENDED P.C.B LAYOUT
(TOLERANCE: ±0.05)

				ANGLAR	±5°	 SWITCH CONNECTOR	DSND	SCALE: N/A	MODEL TYPE:	USB 2.0	
				L ≤ 4	±0.2		DWN	VIEW: 	PART NO.:		
				4 < L ≤ 16	±0.3		CHKD	UNIT: mm/in	DWG NO.:	U241-04XN-2XS1-002	
				16 < L ≤ 63	±0.4		APPD	SIZE: A4	WEIGHT	SHEET	REVISION
				L > 63	±0.5		KE SI DA ELECTRONIC TECHNOLOGY CO., LTD			1/1	A0
REVISIONS WWW.BODONGKAIGUAN.NET WWW.CKJACK.COM WWW.KSDKG.COM						UNspecified TOLERANCES					