


FULL C. C. W POSITION

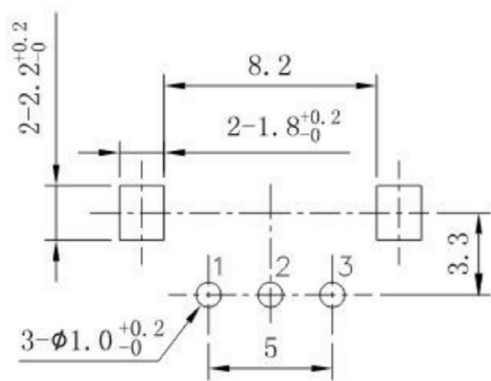

P. C. B MOUNTING HOLE DETAIL

H	6.5	10	12.5
---	-----	----	------

KSD RV093 SERIES ROTARY POTENTIOMETERS
RV093 旋转电位器

Electrical characteristics 电气特性

Total Resistance Range 总阻值	1K _s TRs1MQ
Resistance Tolerance 总阻值容许公差	±20%
Resistance Taper 阻值线性	A,B,C, taper.
Power Rating 负载功率	B taper: 0.05W ; Other taper: 0.03W
Max. operating Voltage 最大工作电压	50V AC / 20V DC
Slide Noise 杂讯	Less than 100mV
Residual Resistance Value 残留阻值	Less than 20Ω
Dielectric Voltage 耐电压	For 1 minute or more AC 250V
Insulation resistance 绝缘阻抗	More than 100MQ at DC 250V


Mechanical characteristics 机械特性

Total Rotational Angle 旋转角度	280°±10°
Rotational Torque 旋转力矩	10gf.cm~100 gf.cm
Stop Strength 止挡强度	2kgf.cm
Push & Pull Strength 推拉强度	2kgf

Environmental characteristics

Rotational Life 旋转寿命	10,000 cycles
----------------------	---------------

RV093 轴心规格

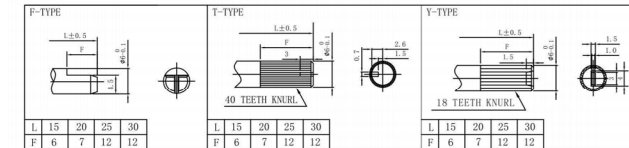

广东科斯达电子科技有限公司
KSDKG Guang dong Keside Electronic Technology Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED: Up to 5 ±0.2, Above 5 ~ 15 ±0.3, Above 15 ~ 30 ±0.4, Above 30 ~ 50 ±0.5, Angle ±0.3°

3RD. ANGEL'S



UNITS MM

DRAWN BY: Jack Lu DATE: 07/23/13
CHECKED BY: Jacky Chen DATE: 07/23/13
APPROVED BY: Tony Kao DATE: 07/23/13

MAT'L		TITLE	ROTARY POTENTIOMETER
FINISH		MODLE	旋转电位器系列
SCALE	1 : 1	DWG NO.	KSD-RV-0931N
SHEET NO.	1 of 1	PART NO.	

2	公差及料號更新	Jack	072313
1	圖面更新	Frank Wu	021012
ITEM NO.	DESCRIPTION	DRAWN	DATE

SIZE	A4
VER	R2