


RS10 SERIES ROTARY SWITCH
RS10 波段开关

Electrical characteristics 电气特性	
Rating Power 额定功率	DC16V 0.1A
Contact Resistance 接触阻抗	Less than 50mΩ
Dielectric Voltage 耐电压	For 1 minute or more AC 100V
Insulation Resistance 绝缘阻抗	More than 100MΩ at DC 100V

Mechanical characteristics 机械特性	
Changeover Angle 切换角度	30°±3°
Rotational Torque 旋转力矩	50gf.cm~300 gf.cm
Switch Type 开关形式	2 Pole 3 position
Shaft Push & Pull Strength 轴推拉强度	10kgf.cm

Environmental characteristics	
Rotational Life 旋转寿命	10,000 cycles

极数表			
RS1010-22/23/24	RS1010-25		
S1 S2	S1 S2		
型号 MODEL	极数 POLE	位数 POSITION	空端子 DUMMY TERMINALS
RS1010-22	2	2	4/5 3/4
RS1010-23	2	3	5 4
RS1010-24	2	4	— —
RS1010-25	2	5	— —

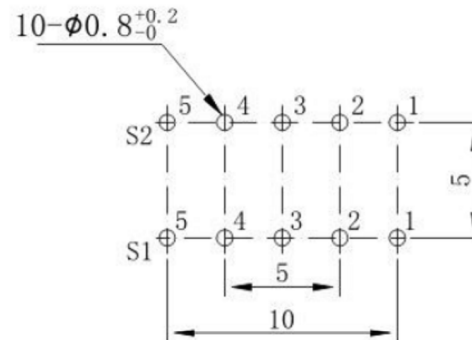

L	15	20	25
F	6	10	10

广东科斯达电子科技有限公司
KSDRG Guang dong Keside Electronic Technology Co., Ltd.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3

3RD. ANGEL'S



UNITS

MM

DRAWN BY: Jack Lu
DATE: 07/23/13
CHECKED BY: Jacky Chen
DATE: 07/23/13
APPROVED BY: Tony Kao
DATE: 07/23/13

MAT'L		TITLE	KSD-RS ROTARY SWITCH	
FINISH		MODLE	KSD-RS旋转开关系列	
SCALE	1 : 1	DWG. NO.	KSD-RS-1010	SIZE A4
SHEET NO.	1 of 1	PART NO.		VER R2

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	公差及料號更新	Jack	072313
1	圖面更新	Frank Wu	021012