



KSD

SWITCH CONNECTOR



SPECIFICATIONS

- FEATUER:** Non shorting
- FUNCTION:** OFF-ON(LOCK)
- RATING:** 3A 30VDC
- CONTACT RESISTANCE:** 30mΩ MAX
- INSULATION RESISTANCE:** 500MΩ min/500V
- ELECTRONICS LIFE TEST:** 6,000 cycles
- MECHANICAL LIFE TEST:** 30,000 cycles


MATERIALS

- CASE:** Glass filled nylon 6/6, Black.
- PLUNGER:** Nylon, Black.
- HOUSING:** Nylon, Black.
- CONTACT / TERMINAL:** Copper, Silver plated.



HOW TO ORDER

MODEL NO.	TYPE	CAP TYPE	CAP COLOR
HB	101	A Rectangle, Nylon B Round, ABS	1 White 2 Black



EXAMPLE:
HB-101 (STD)



▼ DIMENSION

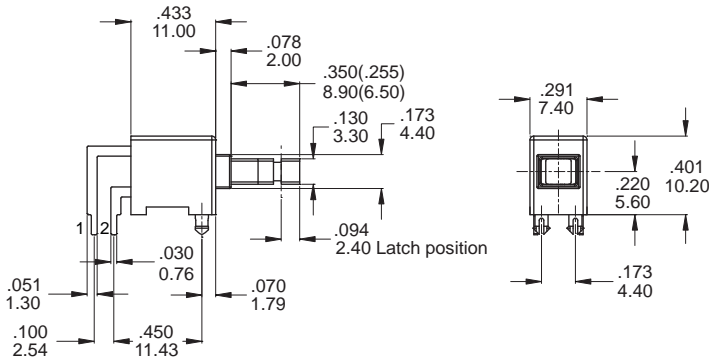

PCB LAYOUT

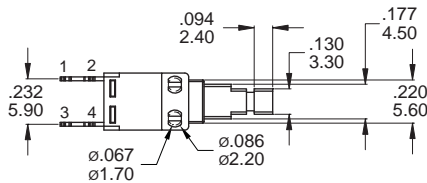


SWITCH FUNCTION

Model name. KSD-HB-101

▼ CAP OPTIONS

A1 Rectangle

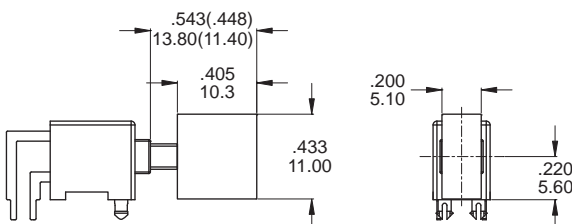

B2 Round

