



KSD

SWITCH CONNECTOR



SPECIFICATIONS

OPERATION: NON-LOCK

RATING: 12 V DC, 50mA

CONTACT RESISTANCE: 100 mΩ MAX.

INSULATION RESISTANCE: 500 V DC, 100MΩ MIN.

OPERATING FORCE: 250 ± 50gf



OPERATION TEMPERATURE RANGE: -20°C~+70°C

OPERATION LIFE: 50,000 CYCLES



SCHEMATIC



▼ DIMENSION




P.C.B LAYOUT

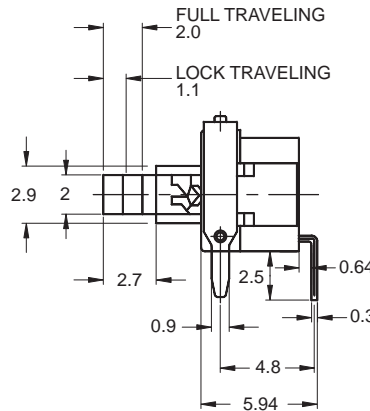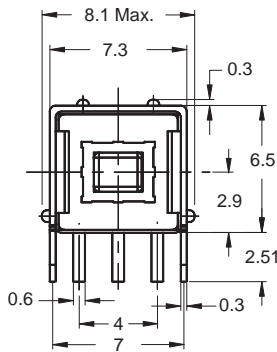


LOCK

Model name. KSD-PS058AHP-LR-R

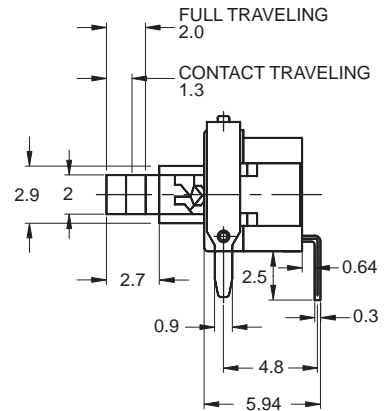

NO LOCK

Model name. KSD-PS058AHP-NR-R

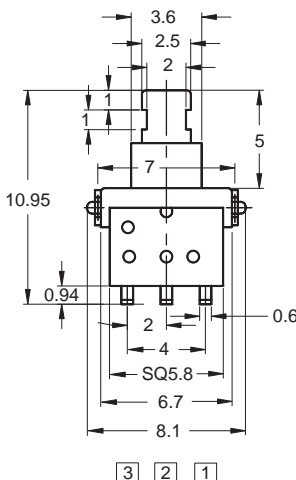

7	TERMINAL	BRASS	2	SILVER PLATING
6	COVER BUSHING	SUS	1	
5	SPRING	SUS	1	
4	CONTACT	COPPER ALLOY	1	SILVER PLATING
3	BASE	NYLON	1	
2	COVER	NYLON	1	
1	KNOB	NYLON	1	
NO.	PARTS	MATERIALS	Q'TY	FINISH