



# KSD

## SWITCH CONNECTOR



ModelName.KSD-DPR-01

### SPECIFICATIONS

#### ELECTRICAL RATING :

DC 15V 3A / RESET-KEY: 12V DC, 50mA (effective value)

**CONTACT RESISTANCE :** < 30mΩ(initial) / RESET-KEY: ≤100mΩ

#### INSULATION RESISTANCE :

> 500MΩ(500VDC between open contacts)

/ RESET-KEY : > 100MΩ(100VDC between open contacts)

#### DIELECTRIC STRENGTH :

> 500V 1 minute / RESET-KEY: > 250V 1 minute (initial value)

**ELECTRICAL LIFE :** 6000 cycles

### MATERIALS

**CASE&HOUSING:** Glass filled Nylon 6/6, Black.



**ACTUATOR :** Glass filled Nylon 6/6, Black.

**CONTACT :** Copper alloy, silver plated.

**TERMINAL :** Copper alloy, silver plated.

**PIN :** Brass, nickel plated.

### ▼ CIRCUIT DIAGRAM

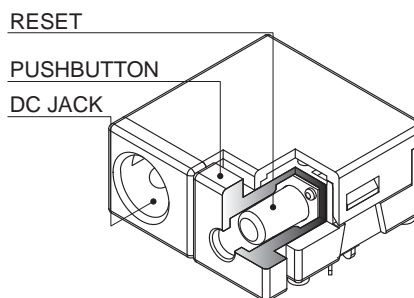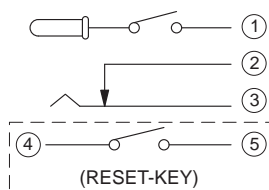

### ▼ DIMENSION

