



**Feature :**

- SPST, momentary function
- Snap in panel mount installation
- Bi-color LED illuminated available

**Application :**

- Automotive industry
- Computer products
- Office appliances
- Communication equipments




SWITCH SPECIFICATIONS	
POLE - POSITION	Momentary Type , SPST with LED
CONTACT RATING	30 V DC , 0.1 A
CONTACT RESISTANCE	50 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	250 ± 100 gf
OPERATING LIFE	50,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	1.3 ± 0.3 mm

LED SPECIFICATIONS		Value / LED Color						
Unit	Blue	Pure Green	Red	Yellow	Orange	Green	White	
								LUMINOUS INTENSITY@20mA Iv
Dominant Wavelength λD	nm	470	525	635	590	601	570	/
FORWARD VOLTAGE@20mA Vf	V	3.2	3.3	1.95	2	2.1	2.1	4


■ A single bin cannot be ordered, please contact us in advance if you need a particular bin sorting before placing your order to clarify the lead time, MOQ and pricing

**▶ HOW TO ORDER**

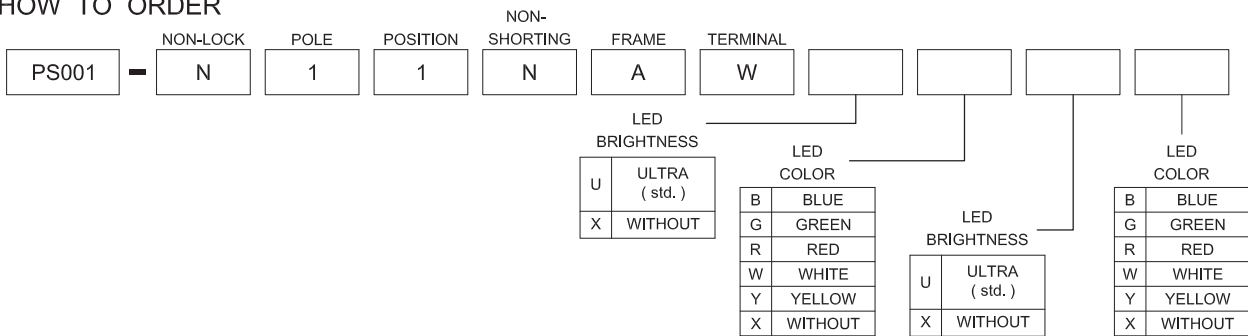


**▶ DIMENSION**

PS001-N11NAW□□□□

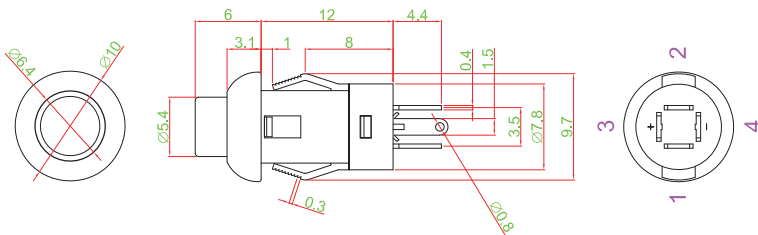

**▶ CIRCUIT**

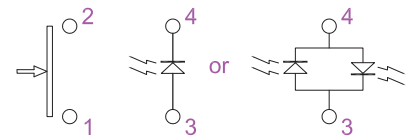

**▶ PANEL CUT OUT**

Z	D
1.3 ~ 2.2	7.7 ~ 8.3
2.2 ~ 3.0	8.3 ~ 8.9
3.0 ~ 3.6	8.9 ~ 9.2

TACT SWITCH

PUSH BUTTON SWITCH

LED TOUCH SENSOR SWITCH

5 DIRECTION NAVIGATION SWITCH WITH LED

MEMBRANE SWITCH

LED LIGHT BAR

SLIDE SWITCH

ROTARY SWITCH

ROCKER SWITCH

DETECT SWITCH

ENCODER

INTERRUPTER

MINIATURE MICRO SWITCH

TELEPHONE HOOK SWITCH

DOOR SWITCH

MINI SIZE SOCKET

KNOB

CAP SYMBOL