

Feature :

SPST
Mini in dimension

Application :

Consumer products
Computer products
Instrumentation
Communication equipments

SWITCH SPECIFICATIONS

| | |
|-----------------------------|--|
| POLE - POSITION | Momentary action , SPST |
| CONTACT RATING | MAX. : 12 V DC , 50 mA ; MIN. : 1 V DC , 50 μ A |
| CONTACT RESISTANCE | 500 m Ω MAX. 5 V DC ; 10 mA , by Method of Voltage DROP |
| INSULATION RESISTANCE | 100 M Ω MIN. 100 V DC for 1 minute |
| DIELECTRIC STRENGTH | Breakdown is not Allowable ; 250 V AC for 1 Minute |
| OPERATING FORCE | 160 \pm 50 gf |
| OPERATING LIFE | 100,000 cycles |
| OPERATING TEMPERATURE RANGE | -40°C ~ 85°C |
| TOTAL TRAVEL | SHARP : 0.2 \pm 0.10 mm ; SOFT : 0.4 \pm 0.10 mm |

► HOW TO ORDER



TERMINAL TYPE

| | |
|----|-------------------|
| A | SMD (std.) |
| B | UP-BEND SMD |
| C | RIGHT ANGLE (SMD) |
| C1 | RIGHT ANGLE (DIP) |





ACTUATOR TYPE

| | |
|---|---------------|
| A | SOFT FEELING |
| B | SHARP FEELING |







► **FRAME TYPE**





TC017-N11AAA






TC017-N11ABB




TC017-N11ACA

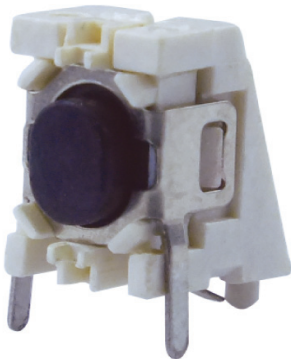

TC017-N11AC1A

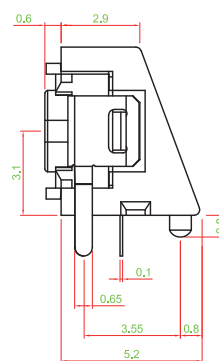

► **CIRCUIT**



TACT SWITCH

PUSH BUTTON SWITCH

LED TOUCH SENSOR SWITCH

5 DIRECTION NAVIGATION SWITCH WITH LED

MEMBRANE SWITCH

LED LIGHT BAR

SLIDE SWITCH

ROTARY SWITCH

ROCKER SWITCH

DETECT SWITCH

ENCODER

INTERRUPTER

MINIATURE MICRO SWITCH

TELEPHONE HOOK SWITCH

DOOR SWITCH

MINI SIZE SOCKET

KNOB

CAP SYMBOL