

Feature :


Small dimension
Max. 8 positions

Application :

High value toy
Power strip voltage selector
Selection key on the application
AV machine, video recorder


SWITCH SPECIFICATIONS	
POLE - POSITION	1P8T , 2P4T
CONTACT RATING	30 V DC , 0.5 A
CONTACT RESISTANCE	25 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	1P8T : 1000 ± 300 gf.cm
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C

▶ HOW TO ORDER

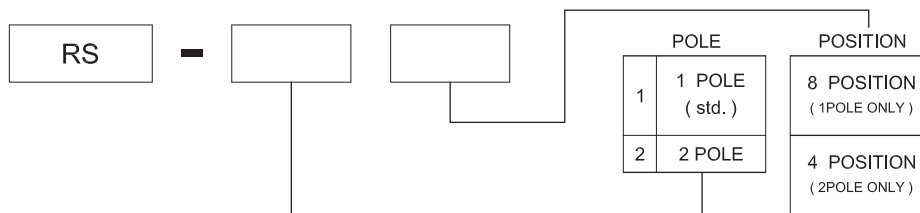


▶ DIMENSION

RS - 18

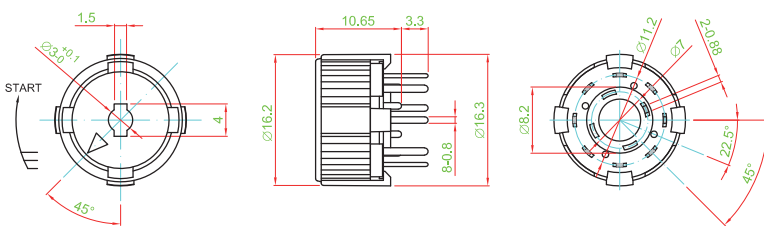


▶ P.C.B. LAYOUT

RS-18




RS-24



▶ CIRCUIT

RS-18



RS-24

