




Feature :

Compact size
P.C.B terminal

Application :

Consumer products
Computer products
Instrumentation
Communication equipments
Hand-held devices




SWITCH SPECIFICATIONS	
POLE - POSITION	3P2T , P.C.B TYPE
CONTACT RATING	50 V DC , 0.5 A
CONTACT RESISTANCE	30 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	300 ± 150gf MAX.
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	3.8 ± 0.2 mm

▶ HOW TO ORDER


SS002	TERMINAL P.C.B TYPE	POLE	POSITION	NON-SHORTING	FRAME TYPE	ACTUATOR MATERIAL	ACTUATOR	ACTUATOR (L)=2
SS002	P	3	2	N	A	P	A	2

▶ DIMENSION

SS002 - P32NAPA2

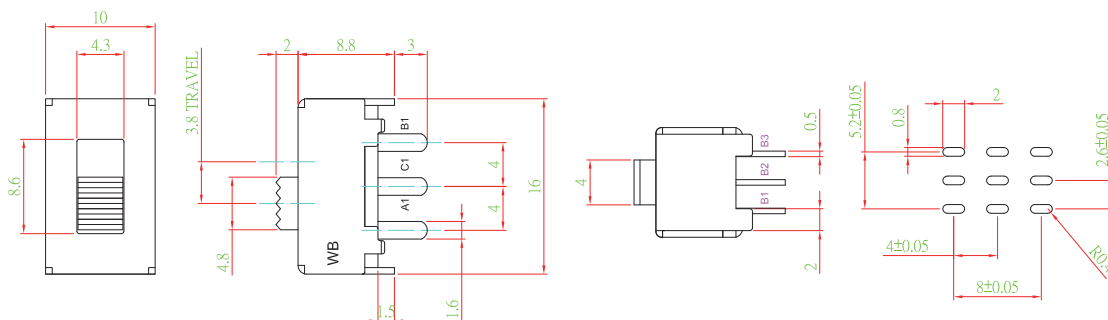

▶ CIRCUIT DIAGRAM



TACT SWITCH

PUSH BUTTON SWITCH

LED TOUCH SENSOR SWITCH

5 DIRECTION NAVIGATION SWITCH WITH LED

MEMBRANE SWITCH

LED LIGHT BAR

SLIDE SWITCH

ROTARY SWITCH

ROCKER SWITCH

DETECT SWITCH

ENCODER

INTERRUPTER

MINIATURE MICRO SWITCH

TELEPHONE HOOK SWITCH

DOOR SWITCH

MINI SIZE SOCKET

KNOB

CAP SYMBOL