

FEATURES

Center push + 4 directional Tact
6.5×7.1×H(5.0mm)

APPLICATIONS


All kinds of electronic equipments such as
car audio and home appliances
Digital Camera, Camcorders, Mobile Phones

COMMON SPECIFICATIONS

Electrical	Rating	DC 15V 20mA	
	Contact Resistance	200mΩ Max.	
	Insulation Resistance	100MΩ Max.	
	Withstand Voltage	AC 250V Min.	
Mechanical	Travel	5°	4 Directional
		0.15±0.1mm	Center
	Operating Force	150±50gf	4 Directional
280±50gf		Center	
Endurance	Operating Life(cycles)	300,000	

No.	Model No.	Dimension Type	PCB Land Dimension Circuit Diagram
1	IT-1502		

IT-1502 Tape & Reel Package Dimensions

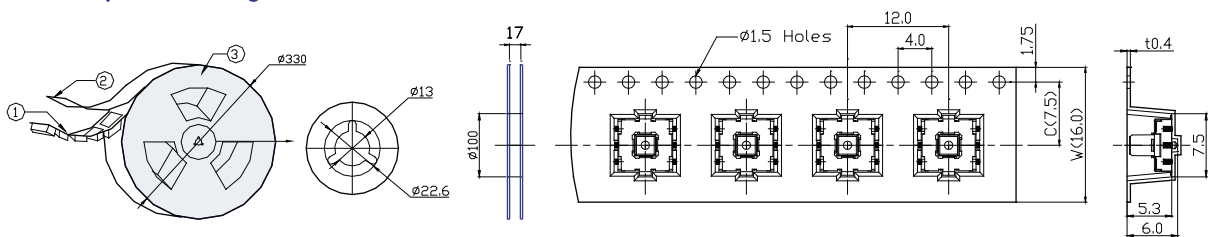

No.	IT-1502 (Knob H mm)	W	C	Pitch	Min. Package Qty / Reel	Qty / Out-carton
1	5.0mm	16	7.5	12	1,000 pcs	20,000 pcs