






# KSD

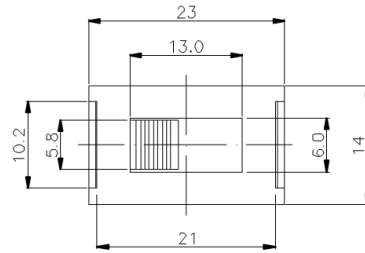

NON-SHORTING  
SCHEMATIC



A DETAIL  
3 : 1

MARKING:

U16SS **KSD**

10(1)A 250V~T85μ

ISSUED	SPECIFICATION (INITIAL)	TITLE: SLIDE SWITCH 2P2T	
	RATING: 10(1)A 250V~	MODEL NO: U16SS-22N02-G(A)	
	CONTACT RESISTANCE: Not more than 30mΩ	UNIT: mm	DWN
	INSULATION RESISTANCE: 500MΩ at 500V DC	SCALE: 2 : 1	CHK'D
	WITHSTAND VOLTAGE: AC 1000V for 1 min	TOLERANCE: ±0.20	APPD.
	OPERATION FORCE: 500±200g		
	SWITCHING LIFE: 10000 Cycles(6-10c/m loading)		
BY:	<b>广东科斯达电子科技有限公司</b> GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DRWG NO:	
DATE:		A20693-00	